

PAR, PSM, CSM, CAR, CAB

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Россия +7(495)268-04-70

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Киргизия +996(312)-96-26-47

Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Саранск (8342)22-96-24
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Казахстан +7(7172)727-132

Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35
Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93



PAR 350 U PLC

PAR 350 U PLC

STANDARD ACCESSORIES

material clamping system

Control panel

Ribbon straightening feet

Electric panel


Ribbon tension system

Angle cut

hydraulic unit

sawdust bucket

Technical details

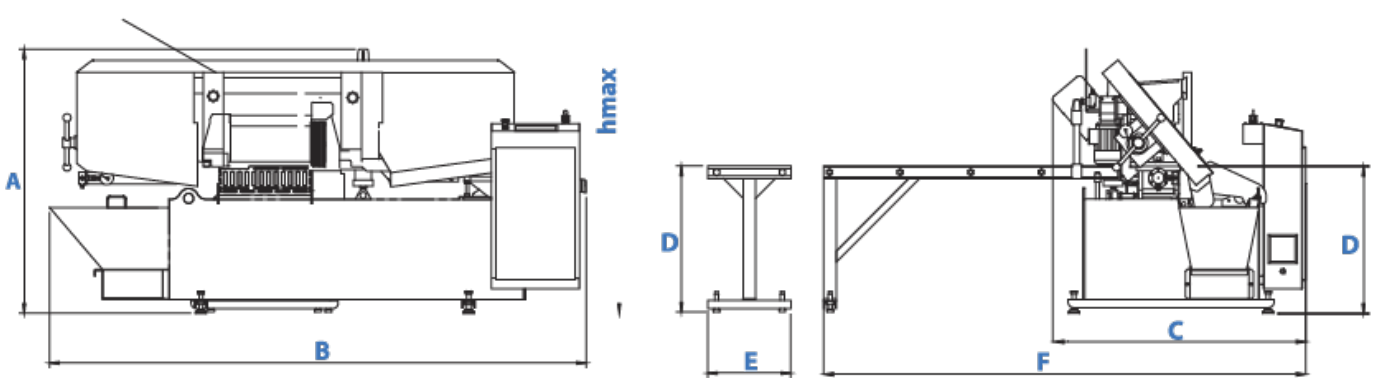

A	1340 mm 52.76 inch	B	2735 mm 107.68 inch	C	1275 mm 50.20 inch	D	750 mm 29.53 inch	E	525 mm 20.67 inch	F	2490 mm 98.03 inch	hmax	2010 mm 79.13 inch
---	-----------------------	---	------------------------	---	-----------------------	---	----------------------	---	----------------------	---	-----------------------	------	-----------------------

Otomatik Automatic	Şerit Ölçüsü Blade Dimension 41x1.3x635 mm 1 1/2 x 0.050x162.4 Inch	Şerit Motoru Blade Motor 4kW-1500 d/dk 5.36 hp 1500 rpm	Sürücü Motor Feeding Motor 0.37kW - 925d/dk 0.49hp - 925rpm
Hidrolik Motor Hydraulic Pump Motor 0.75kW-1400 d/dk 1hp-1400 rpm	Soğutucu Motor Cooling Liquid Motor 0.12kW 3000d/dk 0.16hp - 3000 rpm	Voltaj Voltage 400 V 400 V	Maksimum Güç Maximum Power 5.24 kW 7 hp
Kesme Hızı Cutting Speed 15m/dk-49ft/min 100m/dk-328ft/min	Ağırlık Weight 1200 kg 2645 bs	Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	Şerit Germe Sistemi Blade Tensioning System Hidro mekanik Hydromechanic

Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity	mm inch	60°	45°	30°	0°	15°	20°	30°
350 mm 13.78 inch	400 mm 15.75 inch	● ■ □				350 mm 13.78 Inch 350 x 350 mm 13.78 x 13.78 Inch 200 x 400 mm 7.87 x 15.75 Inch			



PAR 350 U

PAR 350 U

STANDARD ACCESSORIES

material clamping system

Control panel

Ribbon straightening feet

Electric panel


Ribbon tension system

Angle cut

hydraulic unit

sawdust bucket


Technical details

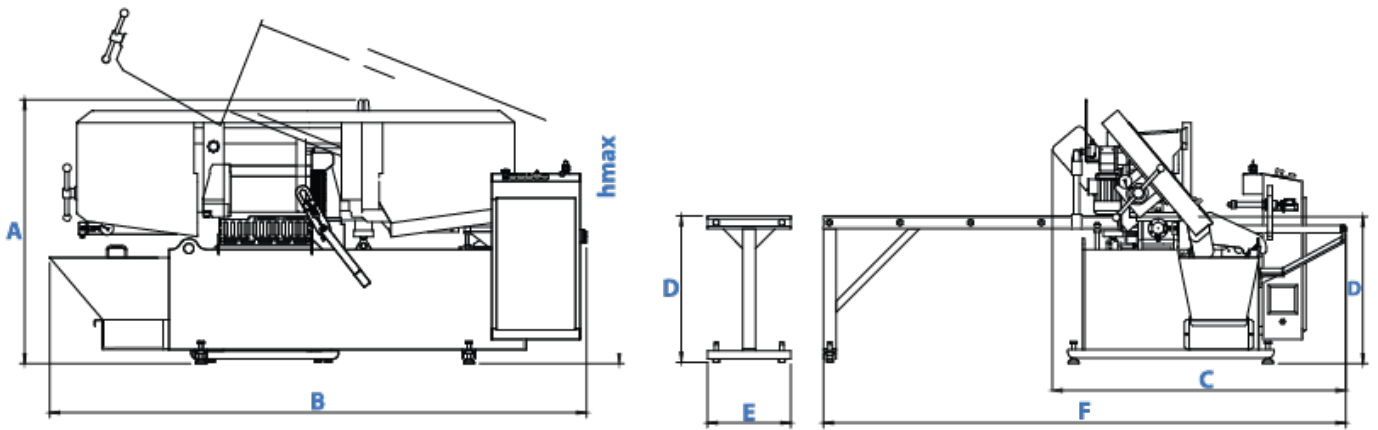

A	1340 mm 52.76 Inch	B	2735 mm 107.68 Inch	C	1465 mm 57.68 Inch	D	750 mm 29.53 Inch	E	525 mm 20.67 Inch	F	2640 mm 103.94 Inch	hmax	2010 mm 79.13 Inch
---	-----------------------	---	------------------------	---	-----------------------	---	----------------------	---	----------------------	---	------------------------	------	-----------------------

Otomatik Automatic	Şerit Ölçüsü Blade Dimension 41x1.3x635 mm 1 1/2 x 0.050x182.4 Inch	kW Şerit Motoru Blade Motor 4 kW-1500 d/dk 5.36 hp /1500 rpm	kW Sürekli Motor Feeding Motor 0.37kW - 925 d/dk 0.49hp - 925 rpm
kW OIL Hidrolik Motor Hydraulic Pump Motor 0.75kW-1400 d/dk 1hp-1400 d/dk	kW H ₂ O Soğutucu Motor Cooling Liquid Motor 0.12kW 3000d/dk 0.16hp - 3000 rpm	Voltaj Voltage 400 V 400 V	Maksimum Güç Maximum Power 524 kW 7 hp
Kesme Hızı Cutting Speed 15 m/dk-49 ft/min 100 m/dk-328 ft/min	KG LBS Ağırlık Weight 1200 kg 2645 lbs	Matzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic


Kesim Kapasitesi Cutting Capacity 350 mm 13.779 Inch	Kesim Kapasitesi Cutting Capacity 400 mm 15.748 Inch	90° mm Inch 60° 45° 30° 0° 30° 45° 60°	Kesim Kapasitesi Cutting Capacity 350 mm 13.78 Inch 350 x 350 mm 13.78 x 13.78 Inch 200 x 400 mm 7.87 x 15.75 Inch			
--	--	--	--	--	--	--

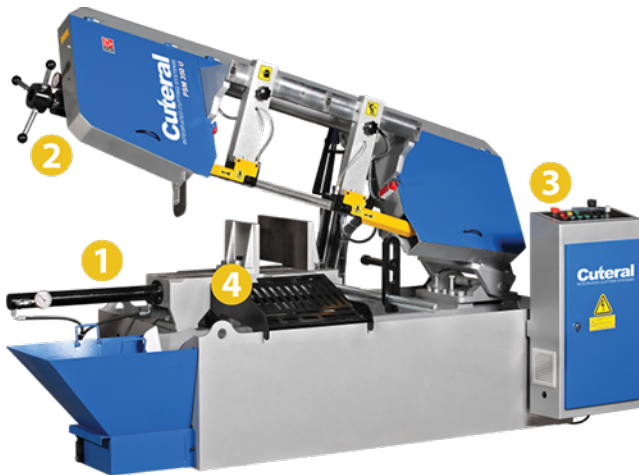

PSM 350U

PSM 350U

Technical details

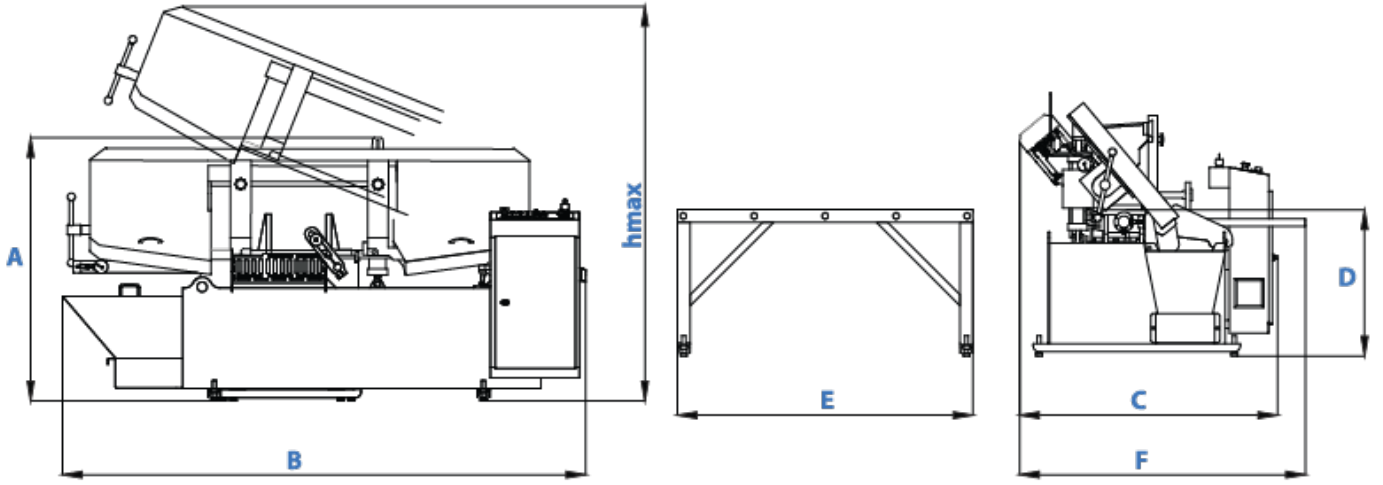

A	1335 mm 52.56 inch	B	2655 mm 104.53 inch	C	1310 mm 51.57 inch	D	740 mm 29.13 inch	E	1500 mm 59.08 inch	F	1450 mm 57.09 inch	hmax	2000 mm 78.74 inch
----------	-----------------------	----------	------------------------	----------	-----------------------	----------	----------------------	----------	-----------------------	----------	-----------------------	-------------	-----------------------

Yarı Otomatik Semi Automatic	Şerit Ölçüsü Blade Dimension 41x1.3x1635 mm 1 1/2 x 0.050x182.4 inch	Şerit Motoru Blade Motor 4kW-1500d/dk 5.36 hp 1500 rpm	Sürücü Motor Feeding Motor Manual Manual
Hidrolik Motor Hydraulic Pump Motor 0.75kW-1400 d/dk 1hp-1400 rpm	Soğutucu Motor Cooling Liquid Motor 0.12kW 3000d/dk 0.16hp - 3000 rpm	Voltaaj Voltage 400 V 400 V	Maksimum Güç Maximum Power 4.87 kW 6.53 hp
Kesme Hızı Cutting Speed 15 m/dk- 49 ft/min 100 m/dk- 328 ft/min	Ağırlık Weight 1200 kg 2645 lbs	Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydromechanic

90°									
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity								
350 mm 13.78 inch	400 mm 15.75 inch	300 mm 11.81 inch	280 x 280 mm 11.02 x 11.02 inch	350 mm 13.78 inch	350 x 350 mm 13.78 x 13.78 inch	350 mm 13.78 inch	350 x 350 mm 13.78 x 13.78 inch	350 x 350 mm 13.78 x 13.78 inch	200 x 300 mm 7.87 x 11.81 inch
									260 x 350 mm 10.24 x 13.78 inch
									210 x 400 mm 8.27 x 15.75 inch



PAR 280 PLC

PAR 280 PLC

STANDARD ACCESSORIES

material clamping system

Control panel

Ribbon straightening feet

Electric panel


Ribbon tension system

Angle cut








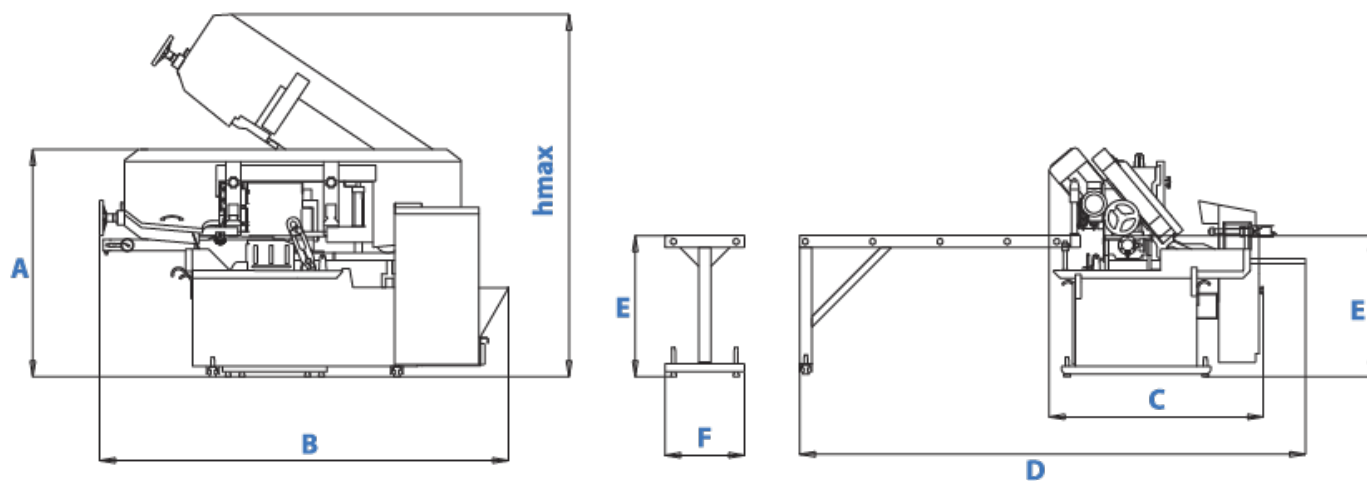




hydraulic unit






























sawdust bucket


Technical details



A	1210 mm 47.64 inch	B	2190 mm 86.22 inch	C	1140 mm 44.88 inch	D	2705 mm 106.50 inch	E	740 mm 29.13 inch	F	525 mm 20.67 inch	hmax	1830 mm 72.04 inch
----------	-----------------------	----------	-----------------------	----------	-----------------------	----------	------------------------	----------	----------------------	----------	----------------------	-------------	-----------------------

	Otomatik Automatic		Şerit Ölçüsü Blade Dimension 27x0.9x2970 mm 1 x 0.035x156.29 inch		Şerit Motoru Blade Motor 2.2kw-1500 d/dk 2.95hp-1500 rpm		Sürüleü Motor Feeding Motor 0.37kW - 925d/dk 0.49hp - 925 rpm
	Hidrolik Motor Hydraulic Pump Motor 0.75kw-1400 d/dk 1hp-1400 rpm		Soğutucu Motor Cooling Liquid Motor 0.12kw-3000d/dk 0.16hp-3000 rpm		Voltaj Voltage 400 V 400 V		Maksimum Güç Maximum Power 3.44 kW 4.61 hp
	Kesme Hızı Cutting Speed 15m/dk-49 ft/mn 130 m/dk-426 ft/mn		Ağırlık Weight 850 kg 1873 lbs		Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic		Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic

	Kesim Kapasitesi Cutting Capacity 250 mm 9.84 inc		Kesim Kapasitesi Cutting Capacity 290 mm 11.42 inch							
										
										
										

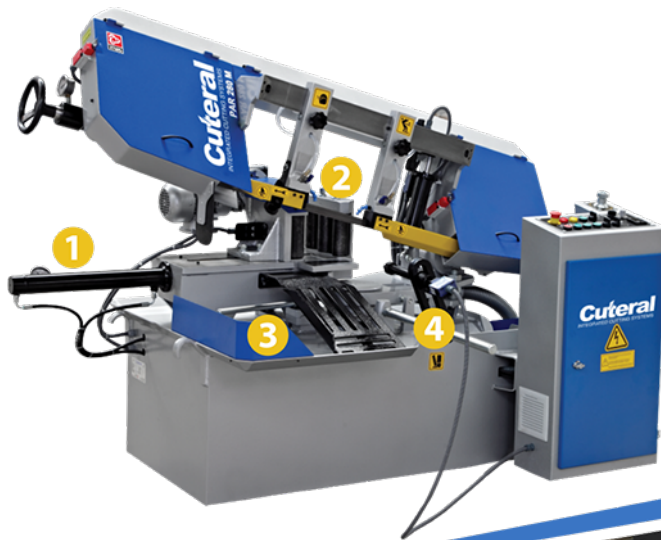

PAR 280M

PAR 280M

STANDARD ACCESSORIES

material clamping system

Control panel

Ribbon straightening feet

Electric panel


Ribbon tension system




Angle cut

hydraulic unit

sawdust bucket

Technical details

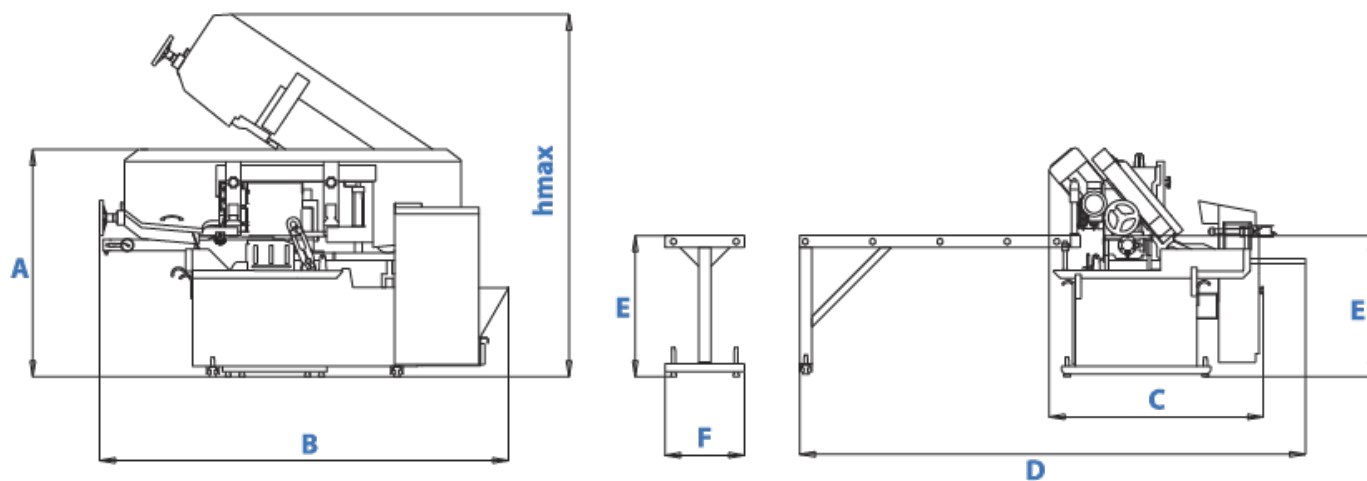

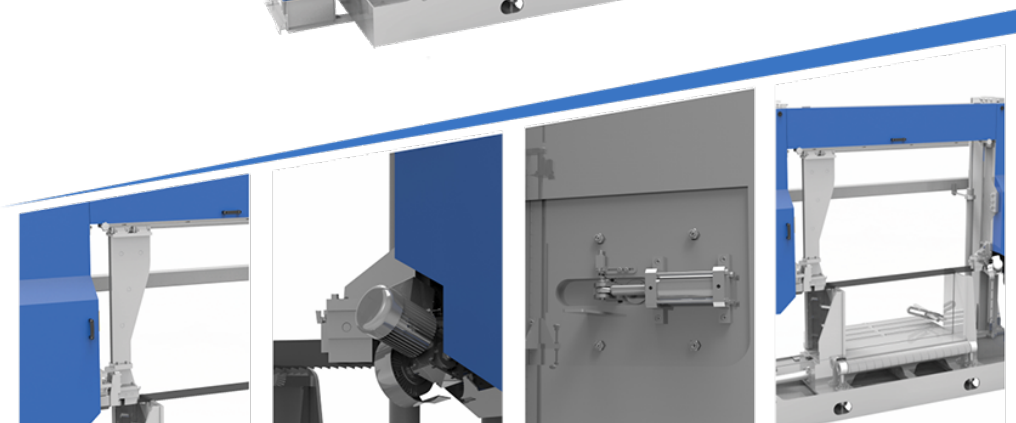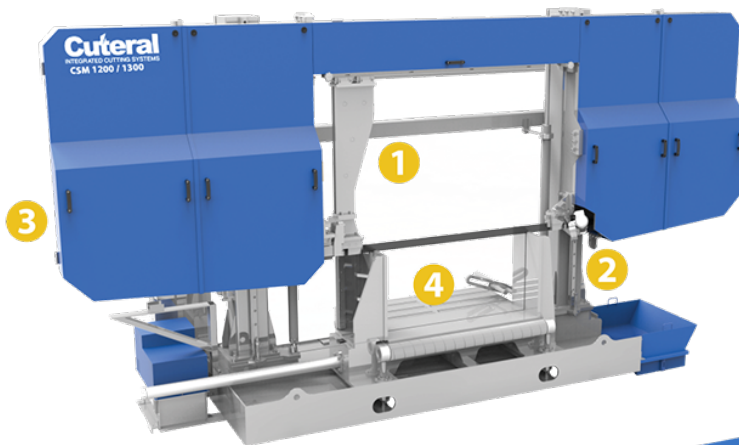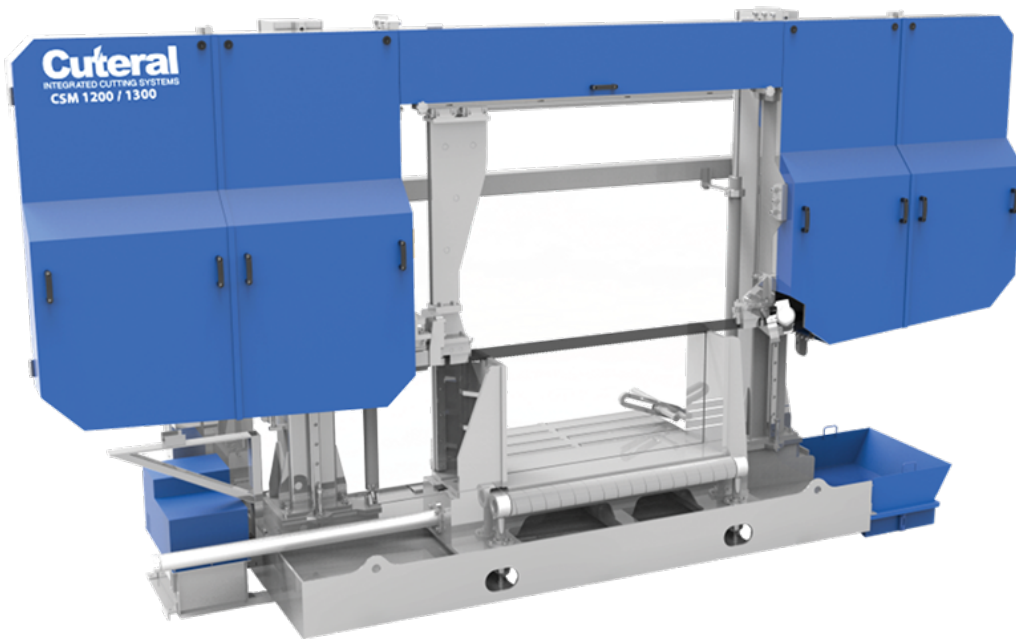

PAR 280

PAR 280

STANDARD ACCESSORIES

material clamping system

Control panel

Ribbon straightening feet

Electric panel



Ribbon tension system

Angle cut









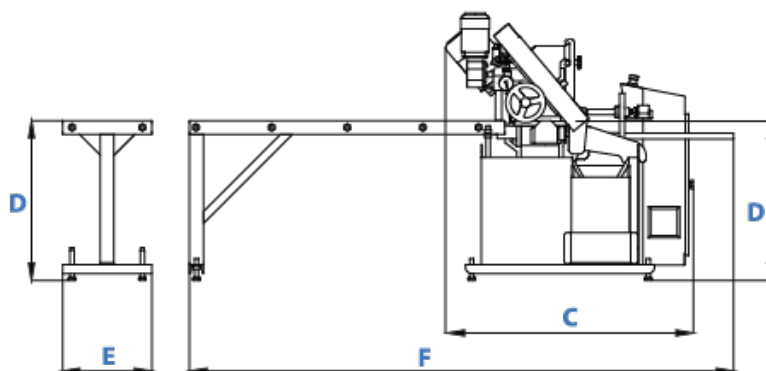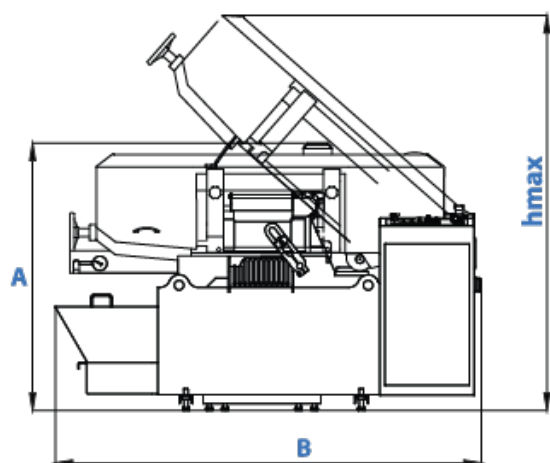



hydraulic unit










sawdust bucket

Technical details



A	1235 mm	B	2030 mm	C	1180 mm	D	757 mm	E	525 mm	F	2580 mm	hmax	1880 mm
	48.62 Inch		79.92 Inch		46.46 Inch		29.80 Inch		20.67 Inch		101.57 Inch		74.02 Inch

	Otomatik Automatic		Şerit Ölçüsü Blade Dimension 27x0.9x3670 mm 1 x 0.035x144.5 Inch		Şerit Motoru Blade Motor 2.2kw-1500 d/dk 2.95hp-1500 rpm		Sürüş Motoru Feeding Motor 0.37kW- 925/dk 0.49hp- 925 rpm
	Hidrolik Motor Hydraulic Pump Motor 0.75kw-1400 d/dk 1hp-1400 rpm		Soğutucu Motor Cooling Liquid Motor 0.12kw-3000d/dk 0.16hp-3000 rpm		Volteji Voltage 400 V 400 V		Maksimum Güç Maximum Power 3.44 kW 4.61 hp
	Kesme Hızı Cutting Speed 15m/dk- 49f/min 130 m/dk- 425 f/min		Ağırlık Weight 620 kg 1367 lbs		Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic		Şerit Germe Sistemi Blade Tensioning System Hidro mekanik Hydramechanic

	Kesim Kapasitesi Cutting Capacity		Kesim Kapasitesi Cutting Capacity	mm inch							
280 mm 11.02 Inc	230 mm 11.42 Inch	●	280 mm 11.02 Inch	●	250 x 250 mm 9.84 x 9.84 Inch	■	150 x 290 mm 5.91 x 11.42 Inch	■			



CUTTERAL Articulated Saw

PSM 420/600M

STANDARD ACCESSORIES

material clamping system

Control panel

Ribbon straightening feet

Electric panel

Ribbon tension system

Angle cut













hydraulic unit









sawdust bucket

Technical details

PSM 420/600 M, semi-automatic, one-way angled band sawing machine with an articulation of 600.

A	1610 mm 63.39 inch	B	2920 mm 114.96 inch	C	1815 mm 63.68 inch	D	750 mm 29.53 inch	E	2000 mm 78.74 inch	hmax	2380 mm 93.70 inch
----------	-----------------------	----------	------------------------	----------	-----------------------	----------	----------------------	----------	-----------------------	-------------	-----------------------

	Yarı Otomatik Semi Automatic		Şerit Ölçüsü Blade Dimension 41x1.3x5280 mm 1 1/2 x 0.050x207.8 inch		Şerit Motoru Blade Motor 4kW-1500 d/dk 5.36 hp 1500 rpm		Sürüş Motoru Feeding Motor Manuel Manual
	Hidrolik Motor Hydraulic Pump Motor 0.75kW-1400 d/dk 1hp-1400 rpm		Soğutucu Motor Cooling Liquid Motor 0.12kW 3000d/dk 0.16hp - 3000 rpm		Voltaaj Voltage 400 V 400 V		Maksimum Güç Maximum Power 4.87 kW 6.53 hp
	Kesme Hızı Cutting Speed 15 m/dk- 49 ft/min 100 m/dk- 328 ft/min		Ağırlık Weight 1500 kg 3306 lbs		Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic		Şerit Germe Sistemi Blade Tensioning System Hidro mekanik Hydramechanic

	90°	mm Inch							
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity	●	330 mm 12.99 inch	420 mm 16.54 inch	420 mm 16.54 inch	420 mm 16.54 inch			
420 mm 16.54 inch	600 mm 23.62 inch	■	270 x 270 mm 10.63 x 10.63 inch	420 x 420 mm 16.54 x 16.54 inch	420 x 420 mm 16.54 x 16.54 inch	420 x 420 mm 16.54 x 16.54 inch			
		■	190 x 310 mm 7.48 x 12.20 inch	250 x 500 mm 9.84 x 19.69 inch	420 x 600 mm 16.54 x 23.62 inch	420 x 600 mm 16.54 x 23.62 inch			



CUTTERAL Articulated Saw

PAR 350M

STANDARD ACCESSORIES

material clamping system

Control panel

Ribbon straightening feet

Electric panel

Ribbon tension system

Angle cut













hydraulic unit









sawdust bucket

Technical details

PAR 350 M is a fully automatic, one-way angled, 300° articulated band saw.

A	1370 mm 53.94 Inch	B	2600 mm 102.36 Inch	C	1480 mm 58.27 Inch	D	775 mm 30.51 Inch	E	525 mm 20.67 Inch	F	2600 mm 110.24 Inch	hmax	2150 mm 84.65 Inch
----------	-----------------------	----------	------------------------	----------	-----------------------	----------	----------------------	----------	----------------------	----------	------------------------	-------------	-----------------------

 Otomatik Automatic	 Şerit Ölçüsü Blade Dimension 34x1.1x4570 mm 1 1/4x0.042x180Inch	 Şerit Motoru Blade Motor 4 Kw-1500 d/dk 5.36hp -1500rpm	 Sürücü Motor Feeding Motor 0.37kW - 925/dk 0.49hp - 925rpm
 Hidrolik Motor Hydraulic Pump Motor 0.75kW-1400/dk 1 hp-1400 rpm	 Soğutucu Motor Cooling Liquid Motor 0.12kW 3000/dk 0.16hp - 3000 rpm	 Voltaaj Voltage 400 V 400 V	 Maksimum Güç Maximum Power 5.24 kW 7hp
 Kesme Hız Cutting Speed 15 m/dk- 115ft/min 100 m/dk-230 ft/min	 Ağırlık Weight 1150 kg 2335 lbs	 Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	 Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic

 90°	mm inch							
Kesim Kapasitesi Cutting Capacity	●				350 mm 13.78 Inch	350 mm 13.78 Inch	320 mm 12.60 Inch	
Kesim Kapasitesi Cutting Capacity	■				350 x 350 mm 13.78 x 13.78 Inch	350 x 350 mm 13.78 x 13.78 Inch	300 x 300 mm 11.81 x 11.81 Inch	
350 mm 13.78 Inch	■				350 x 460 mm 13.78 x 18.11 Inch	250 x 400 mm 9.84 x 15.75 Inch	320 x 180 mm 12.60 x 7.09 Inch	
460 mm 18.11 Inch	■							



CUTTERAL Articulated Saw

PSM 350M

STANDARD ACCESSORIES

material clamping system

Control panel

Ribbon straightening feet

Electric panel

Ribbon tension system

Angle cut













hydraulic unit









sawdust bucket

Technical details

PSM 350 M, semi-automatic, one-way angled, 350-angle articulated saw table.

A	1360 mm 53.54 inch	B	2600 mm 102.36 inch	C	1480 mm 58.27 inch	D	1500 mm 59.06 inch	E	780 mm 30.71 inch	F	1355 mm 53.35 inch	hmax	2080 mm 81.89 inch
----------	-----------------------	----------	------------------------	----------	-----------------------	----------	-----------------------	----------	----------------------	----------	-----------------------	-------------	-----------------------

 Yarı Otomatik Semi Automatic		 Şerit Ölçüsü Blade Dimension 34x1.1x4570 mm 1 1/4 x0.042x180 inch	 Şerit Motoru Blade Motor 4 Kw-1500 d/dk 5.36hp -1500 rpm	 Sürücü Motor Feeding Motor Manual Manual
 Hidrolik Motor Hydraulic Pump Motor 0.75kW-1400d/dk 1 hp-1400 rpm	 Soğutucu Motor Cooling Liquid Motor 0.12kW 3000d/dk 0.16hp -3000 rpm	 Voltaaj Voltage 400 V 400 V	 Maksimum Güç Maximum Power 4.87 kW 6.5 HP	
 Kesme Hızı Cutting Speed 15 m/dk-49 f/min 100 m/dk-328 f/min	 Ağırlık Weight 1150 kg 2535 lbs	 Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	 Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic	

 90°	mm inch							
Kesim Kapasitesi Cutting Capacity 350 mm 13.78 inch	Kesim Kapasitesi Cutting Capacity 460 mm 18.11 inch				350 mm 13.78 inch	350 mm 13.78 inch	300 mm 11.81 inch	
					350 x 350 mm 13.78 x 13.78 inch	350 x 350 mm 13.78 x 13.78 inch	250 x 250 mm 9.84 x 9.84 inch	
					350 x 460 mm 13.78 x 18.11 inch	300 x 350 mm 11.81 x 13.78 inch	250 x 300 mm 9.84 x 11.81 inch	



CUTTERAL Articulated Saw

PAR 300M

STANDARD ACCESSORIES

material clamping system

Control panel

Ribbon straightening feet

Electric panel

Ribbon tension system

Angle cut













hydraulic unit









sawdust bucket

Technical details

The PAR 300 M is a fully automatic, one-way angled, articulated band saw of 300.

A	1210 mm 47.64 inch	B	2190 mm 86.22 inch	C	1140 mm 44.88 inch	D	2705 mm 106.50 inch	E	740 mm 29.13 inch	F	525 mm 20.67 inch	hmax	1830 mm 72.04 inch
----------	-----------------------	----------	-----------------------	----------	-----------------------	----------	------------------------	----------	----------------------	----------	----------------------	-------------	-----------------------

 Otomatik Automatic	 Şerit Ölçüsü Blade Dimension 27x0.9x3970 mm 1 x 0.035x156.29 inch	 Şerit Motoru Blade Motor 2.2kw-1500 d/dk 2.95hp-1500 rpm	 Sürüş Motoru Feeding Motor 0.37kW - 925d/dk 0.49hp - 925 rpm
 Hidrolik Motor Hydraulic Pump Motor 0.75kw-1400 d/dk 1hp-1400 rpm	 Soğutucu Motor Cooling Liquid Motor 0.12kw-3000d/dk 0.16hp-3000 rpm	 Voltaaj Voltage 400 V 400 V	 Maksimum Güç Maximum Power 3.44 kW 4.61 hp
 Keşme Hızı Cutting Speed 15m/dk-49 ft/mn 130 m/dk-426 ft/mn	 Ağırlık Weight 850 kg 1873 lbs	 Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	 Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic

	90°	mm inch							
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity	●				280 mm 11.02 Inch	240 mm 9.45 Inch	180 mm 7.09 Inch	
250 mm 9.84 inc	290 mm 11.42 inch	■				250 x 250 mm 9.84 x 9.84 inch	210 x 210 mm 8.27 x 8.27 inch	180 x 180 mm 7.09 x 7.09 inch	
		■				150 x 290 mm 5.91 x 11.42 inch	200 x 230 mm 7.87 x 9.06 inch	120 x 180 mm 4.72 x 7.09 inch	



CUTTERAL Articulated Saw

PSM 300M

STANDARD ACCESSORIES

material clamping system

Control panel

Ribbon straightening feet

Electric panel

Ribbon tension system

Angle cut













hydraulic unit









sawdust bucket

Technical details

PSM 300 M is a semi-automatic, one-way angle, 300-joint band saw table.

A	1225 mm 48.23 Inch	B	2185 mm 86.02 Inch	C	1135 mm 44.69 Inch	D	750 mm 29.53 Inch	E	1500 mm 59.06 Inch	F	1370 mm 53.94 Inch	hmax	1845 mm 72.64 Inch
----------	-----------------------	----------	-----------------------	----------	-----------------------	----------	----------------------	----------	-----------------------	----------	-----------------------	-------------	-----------------------

 Yarı Otomatik Semi Automatic	 Şerit Ölçüsü Blade Dimension 27x0.9x3970 mm 1 x 0.035x156.3 Inch	 Şerit Motoru Blade Motor 2.2kw-1500 d/dk 2.95hp-1500 rpm	 Sürücü Motor Feeding Motor Manuel Manual
 Hidrolik Motor Hydraulic Pump Motor 0.75kw-1400 d/dk 1hp-1400 rpm	 Soğutucu Motor Cooling Liquid Motor 0.12kw-3000d/dk 0.16hp-3000 rpm	 Voltaaj Voltage 400 V 400 V	 Maksimum Güç Maximum Power 3.07 kW 4.11 hp
 Kesme Hızı Cutting Speed 15m/dk-48 f/min 130 m/dk- 426 ft/min	 Ağırlık Weight 850 kg 1873 lbs	 Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	 Şerit Germe Sistemi Blade Tensioning System Hidro mekanik Hydromechanic

 90°	mm Inch	 60°	 45°	 30°	 0°	 10°	 45°	 60°
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity	●	180 mm 7.09 Inch	230 mm 9.06 Inch	280 mm 11.02 Inch			
260 mm 11.02 Inch	280 mm 11.02 Inch	■	150 x 150 mm 5.91 x 5.91 Inch	210 x 210 mm 8.27 x 8.27 Inch	250 x 250 mm 9.84 x 9.84 Inch			
		■	150 x 165 mm 5.91 x 6.50 Inch	220 x 165 mm 8.66 x 6.50 Inch	150 x 280 mm 5.91 x 11.02 Inch			



CUTTERAL Articulated Saw

PSM 280

STANDARD ACCESSORIES

material clamping system

Control panel

Ribbon straightening feet

Electric panel

Ribbon tension system

Angle cut













hydraulic unit










sawdust bucket

Technical details

PSM 280 is a semi-automatic, one-way angle, 280 articulated band saw table.

A	1235 mm 48.52 Inch	B	2200 mm 86.61 Inch	C	1065 mm 41.93 Inch	D	725 mm 28.54 Inch	E	1500 mm 59.06 Inch	F	1375 mm 54.13 Inch	hmax	1880 mm 74.02 Inch
----------	-----------------------	----------	-----------------------	----------	-----------------------	----------	----------------------	----------	-----------------------	----------	-----------------------	-------------	-----------------------

 Yarı Otomatik Semi Automatic	 Şerit Ölçüsü Blade Dimension 27x0.9x3670 mm 1 x 0.035x144.5 Inch	 Şerit Motoru Blade Motor 2.2kw-1500 d/dk 2.95hp-1500 rpm	 Sürücü Motor Feeding Motor Manual
 Hidrolik Motor Hydraulic Pump Motor 0.75kw-1400 d/dk 1hp-1400 rpm	 Soğutucu Motor Cooling Liquid Motor 0.12kw-3000d/dk 0.16hp-3000 rpm	 Voltaaj Voltage 400 V 400 V	 Maksimum Güç Maximum Power 3.07 KW 4.11 hp
 Kesme Hızı Cutting Speed 15m/dk- 49ft/min 130m/dk- 426ft/min	 Ağırlık Weight 600 kg 1322 lbs	 Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	 Şerit Germe Sistemi Blade Tensioning System Hidro mekanik Hydramechanic

 90°								
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity		250 mm 9.84 Inch	280 mm 11.02 Inch	280 mm 11.02 Inch			
250 mm 7.67 Inch	300 mm 11.81 Inch		210 x 210 mm 8.27 x 8.27 Inch	280 x 280 mm 11.02 x 11.02 Inch	250 x 250 mm 9.84 x 9.84 Inch			
			200 x 220 mm 7.87 x 8.66 Inch	280 x 280 mm 11.02 x 11.02 Inch	140 x 300 mm 5.51 x 11.81 Inch			



CUTTERAL Articulated Saw

PSM 220/330 DM

STANDARD ACCESSORIES

material clamping system

Control panel

Ribbon straightening feet

Electric panel

Ribbon tension system

Angle cut













hydraulic unit









sawdust bucket

Technical details

PSM 220/330 DM, semi-automatic, double angled, 330 band saw table.

A	1545 mm 60.83 inch	B	1780 mm 70.08 inch	C	1030 mm 40.55 inch	D	400 mm 15.75 inch	E	970 mm 38.19 inch	F	1470 mm 57.87 inch	hmax	2060 mm 81.10 inch
----------	-----------------------	----------	-----------------------	----------	-----------------------	----------	----------------------	----------	----------------------	----------	-----------------------	-------------	-----------------------

 Yarı Otomatik Semi Automatic	 Şerit Ölçüsü Blade Dimension 27x0.9x3175 mm 1x0.035x125 inch	 Şerit Motoru Blade Motor 0.6kw-700d/d 0.8hp 700 rpm 0.9kw-1500d/d 1.2hp 1500 rpm	 Sürücü Motor Feeding Motor Manuel Manual
 Hidrolik Motor Hydraulic Pump Motor 0.25kw-1500 d/dk 0.34hp-1500 rpm	 Soğutucu Motor Cooling Liquid Motor 0.12kw 3000d/dk 0.16hp -3000 rpm	 Voltaaj Voltage 400 V 400 V	 Maksimum Güç Maximum Power MAX 1.27 KW 1.70 hp
 Kesme Hızı Cutting Speed 35m/dk-115ft/min 70m/dk-230 ft/min	 Ağırlık Weight 580 kg 1278 lbs	 Malzeme Sıkma Sistemi Material Clamping System Manuel Manual	 Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydraulic

	90°	mm inch							
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity	<input type="checkbox"/>	200 mm 7.87 inch	220 mm 8.66 inch	220 mm 8.66 inch	220 mm 8.66 inch	220 mm 8.66 inch	180 mm 7.08 inch	100 mm 3.93 inch
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	175 x 175 mm 6.89 x 6.89 inch	220 x 220 mm 8.66 x 8.66 inch	220 x 220 mm 8.66 x 8.66 inch	220 x 220 mm 8.66 x 8.66 inch	220 x 220 mm 8.66 x 8.66 inch	180 x 180 mm 7.08 x 7.08 inch	100 x 100 mm 3.93 x 3.93 inch
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	200 x 180 mm 7.87 x 6.30 inch	220 x 230 mm 8.66 x 9.05 inch	220 x 230 mm 8.66 x 9.05 inch	220 x 330 mm 8.66 x 12.99 inch	220 x 230 mm 8.66 x 9.05 inch	210 x 180 mm 8.27 x 7.08 inch	100 x 100 mm 3.93 x 3.93 inch



CUTTERAL Articulated Saw

PSM 220M

STANDARD ACCESSORIES

material clamping system

Control panel

Ribbon straightening feet

Electric panel

Ribbon tension system

Angle cut












hydraulic unit











sawdust bucket

Technical details

CUTTERAL PSM 220 M is a semi-automatic, one-way angle, 220 articulated band saw table.

A	1485 mm 58.46 inch	B	1406 mm 55.35 inch	C	538 mm 21.18 inch	D	400 mm 15.75 inch	E	915 mm 36.02 inch	F	1075 mm 42.32 inch	hmax	1800 mm 70.87 inch
----------	-----------------------	----------	-----------------------	----------	----------------------	----------	----------------------	----------	----------------------	----------	-----------------------	-------------	-----------------------

 Yarı Otomatik Semi Automatic	 Şerit Ölçüsü Blade Dimension 27x0.9x2480 mm 1x 0.035x97.64 inch	 Şerit Motoru Blade Motor 1.1kW-1400/d 1.47hp 1400 rpm	 Sürücü Motor Feeding Motor Manuel Manual
 Soğutucu Motor Cooling Liquid Motor 0.12kW 3000/dk 0.16hp - 3000 rpm	 Voltaaj Voltage 220 V 220 V	 Maksimum Güç Maximum Power 1.22 kW 1.47hp	 Kesme Hızı Cutting Speed 25m/dk-82 ft/min 90m/dk-295 ft/min
 Ağırlık Weight 250 kg 551.16 lbs	 Malzeme Sıkma Sistemi Material Clamping System Manuel Manual	 Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic	


 90°	 mm inch	 60°	 45°	 30°	 0°	 10°	 15°	 45°	 60°
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity				220 mm 8.66 inch	200 mm 7.87 inch	150 mm 5.90 inch	80 mm 3.15 inch	
220 mm 8.66 inch	250 mm 9.84 inch				220 x 220 mm 8.66 x 8.66 inch	180 x 180 mm 7.09 x 7.09 inch	140 x 140 mm 5.51 x 5.51 inch	80 x 80 mm 3.15 x 3.15 inch	
					200 x 250 mm 7.87 x 9.84 inch	200 x 180 mm 7.87 x 7.09 inch	140 x 150 mm 5.51 x 5.91 inch	80 x 80 mm 3.15 x 3.15 inch	



PSM 440 - 610 DM NC




PSM 440 - 610 DM NC

Technical details

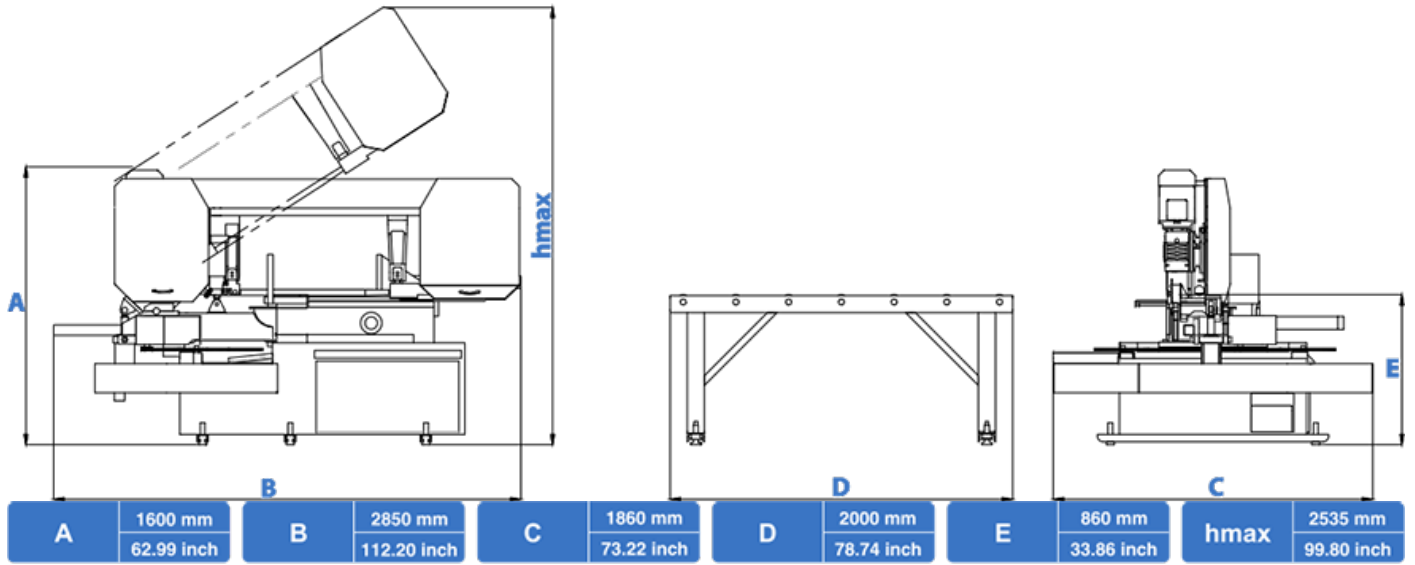

Otomatik Automatic	Şerit Ölçüsü Blade Dimension 34x1.1x5110 mm 1 1/4x0.042x201.1 inch	Şerit Motoru Blade Motor 4kw -1500 d/dk 5.36 hp - 1500rpm	Sürücü Motor Feeding Motor Manuel Manual
Hidrolik Motor Hydraulic Pump Motor 0.75 kW - 1400 didk 0.5 hp-1400 rpm	Soğutucu Motor Cooling Liquid Motor 0.12kw- 3000d/dk 0.16 hp -3000 rpm	Voltaj Voltage 400 V 400 V	Maksimum Güç Maximum Power 4.87 kw 6.53 hp
Kesme Hızı Cutting Speed 15 m/dk- 49 ft/min 100 m/dk- 328 ft/min	Ağırlık Weight 1680 kg 3703 lbs	Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic


Kesim Kapasitesi Cutting Capacity		mm inch	60°	45°	30°	0°	15°	45°	60°
440 mm 17.32 inch	610 mm 24.02 inch	●	250 mm 9.84 inch	400 mm 15.75 inch	440 mm 17.32 inch	440 mm 17.32 inch	440 mm 17.32 inch	400 mm 15.75 inch	260 mm 10.24 inch
		■	250 x 250 mm 9.84 x 9.84 inch	380 x 380 mm 14.96 x 14.96 inch	440 x 440 mm 17.32 x 17.32 inch	440x 440 mm 17.32 x 17.32 inch	440 x 440 mm 17.32 x 17.32 inch	380 x 400 mm 14.96 x 15.75 inch	260 x 260 mm 10.24 x 10.24 inch
		■	440 x 240 mm 17.32 x 9.45 inch	380 x 400 mm 14.96 x 15.75 inch	440 x 500 mm 17.32 x 19.69 inch	440 x 610 mm 17.32 x 24.02 inch	440 x 500 mm 17.32 x 19.69 inch	380 x 400 mm 14.96 x 15.75 inch	440 x 240 mm 17.32 x 9.45 inch

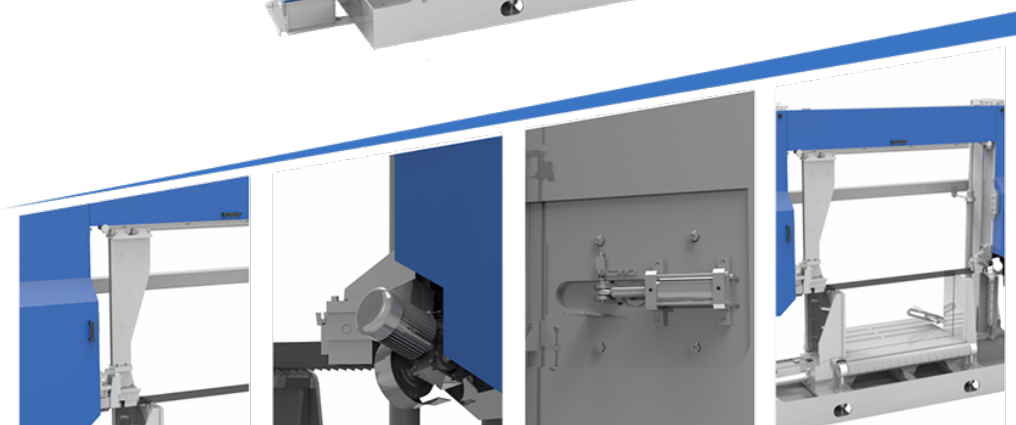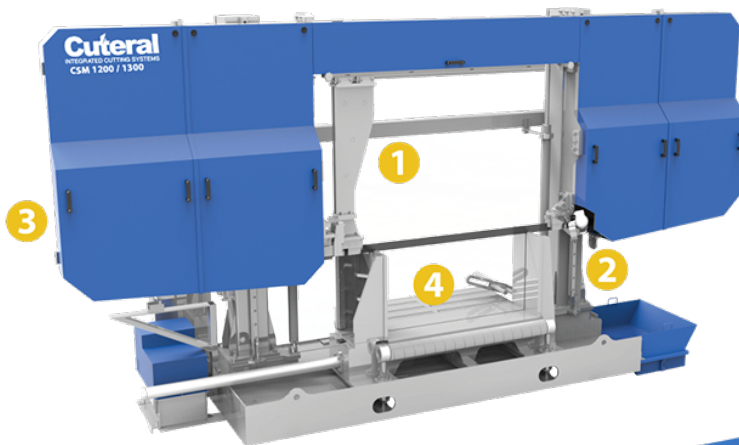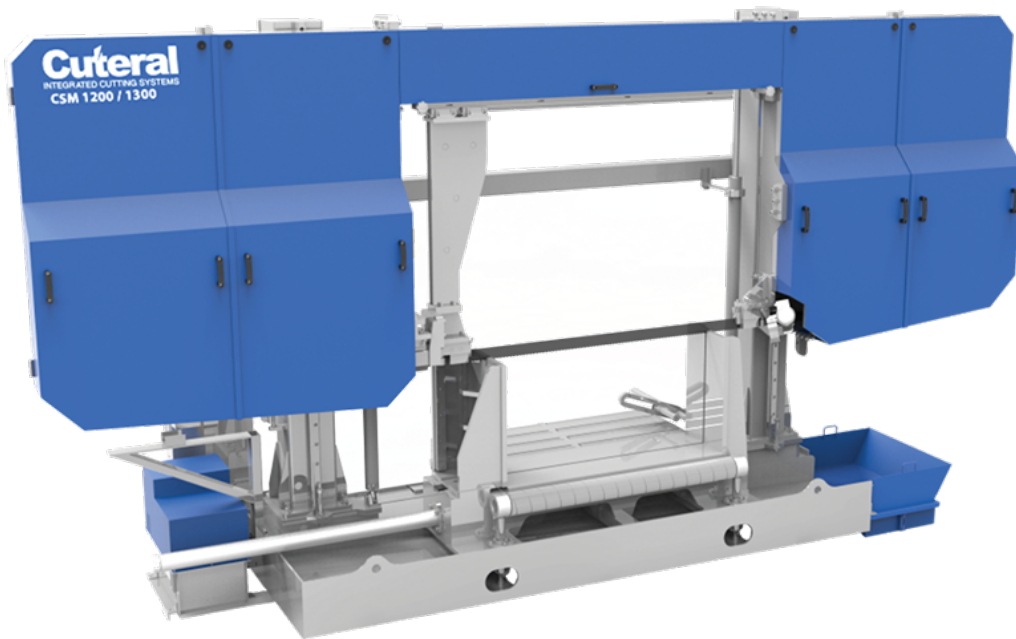

CSM 1200-1300

CSM 1200-1300



Technical details

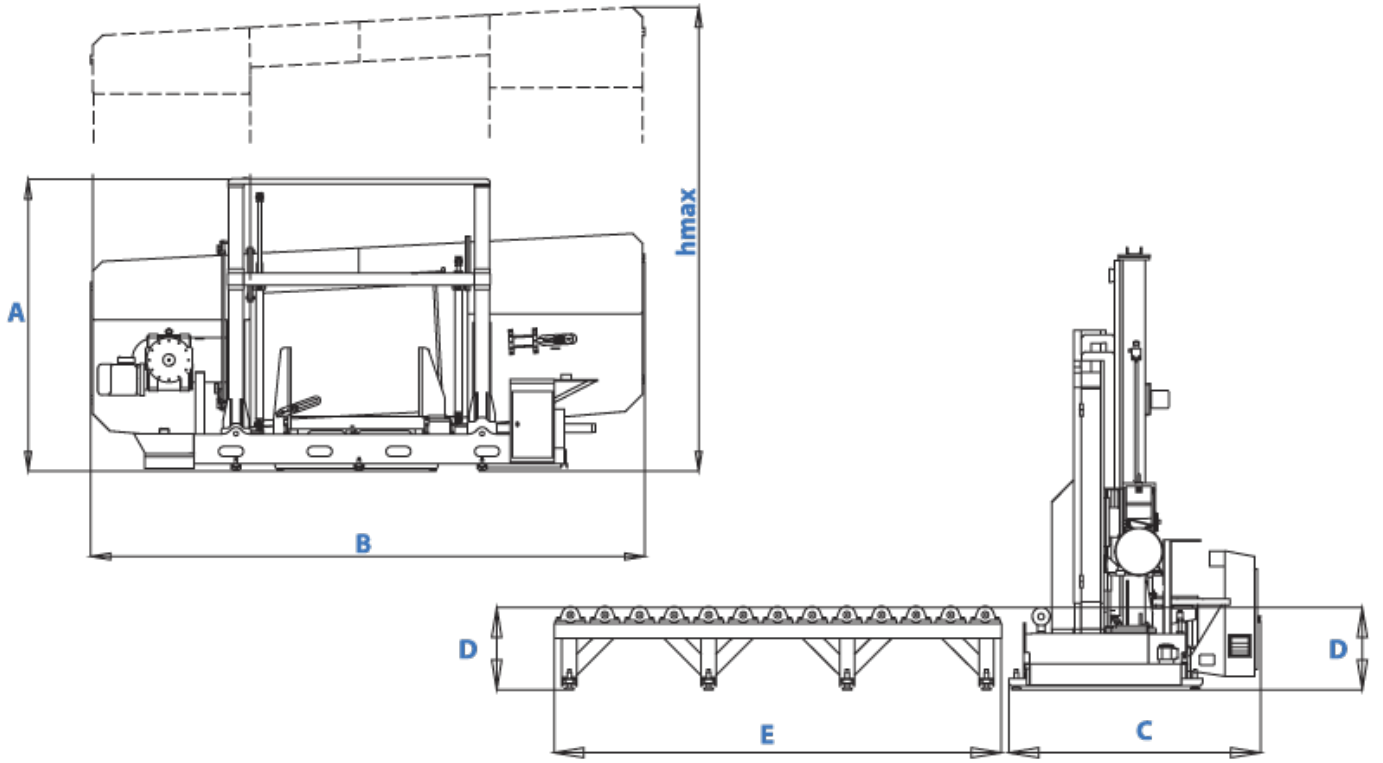

A	3000 mm 118.11 inch	B	5625 mm 221.48 inch	C	1690 mm 66.54 inch	D	525 mm 20.67 inch	E	3000 mm 118.11 inch	hmax	3725 mm 146.65 inch
----------	------------------------	----------	------------------------	----------	-----------------------	----------	----------------------	----------	------------------------	-------------	------------------------

Yarı Otomatik Semi Automatic	Şerit Ölçüsü Blade Dimension 67x1.6x12450 mm 2 5/8 x0.063x490.1 inch	Şerit Motoru Blade Motor 7.5kW-1500 d/dk 10hp-1500 rpm	Taleş Fırçası M. Chip Brush M. 0.09 kW-1500 d/dk 0.12hp / 1500 rpm
Hidrolik Motor Hydraulic Pump Motor 3kW-1500 d/dk 4hp-1500 rpm	Soğutucu Motor Cooling Liquid Motor 0.12kW 3000d/dk 0.16hp - 3000 rpm	Voltaaj Voltage 400 V 400 V	Maksimum Güç Maximum Power 10.71 kW 14.36 hp
Kesme Hızı Cutting Speed 15 m/dk-49 ft/mn 100 m/dk- 328 ft/mn	Ağırlık Weight 7000 kg 15432 bs	Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	Şerit Germe Sistemi Blade Tensioning System Hidro mekanik Hydramechanic


Kesim Kapasitesi Cutting Capacity 1200 mm 47.24 inch	Kesim Kapasitesi Cutting Capacity 1300 mm 51.18 inch							

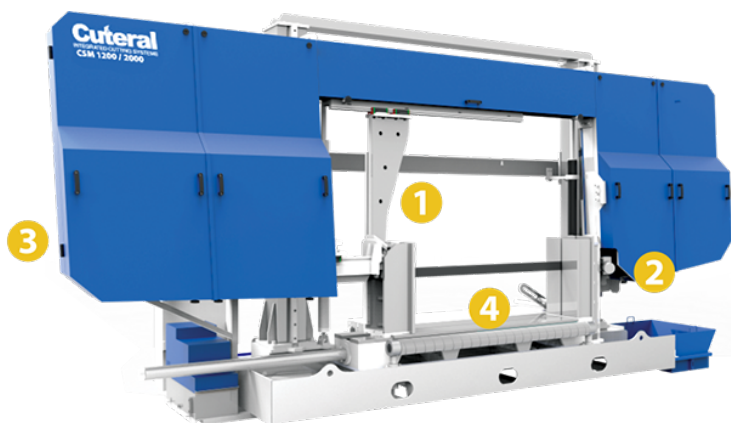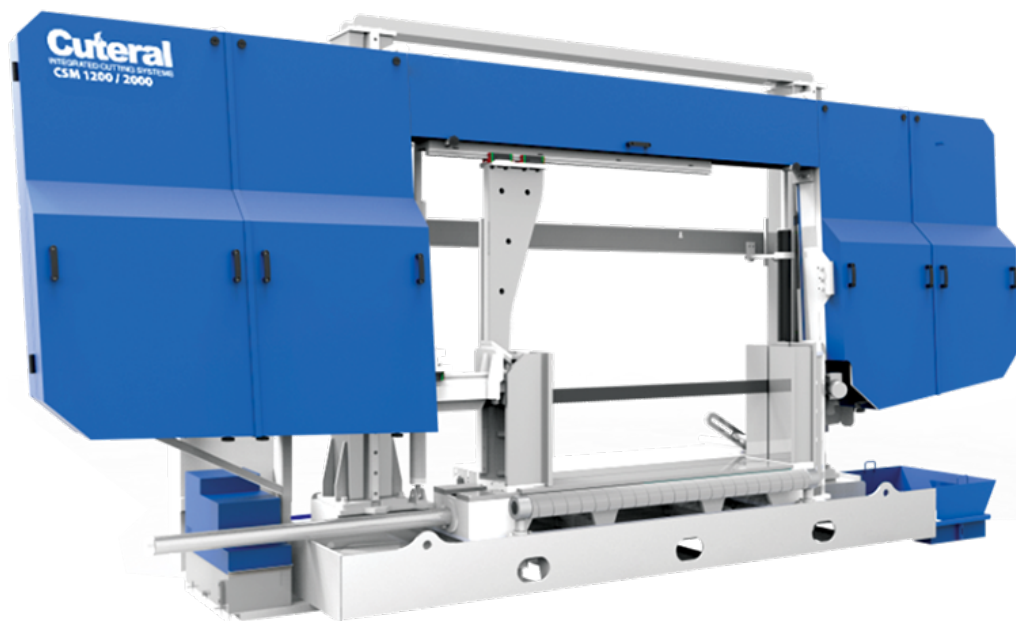

CSM 1200-2000

CSM 1200-2000


Technical details

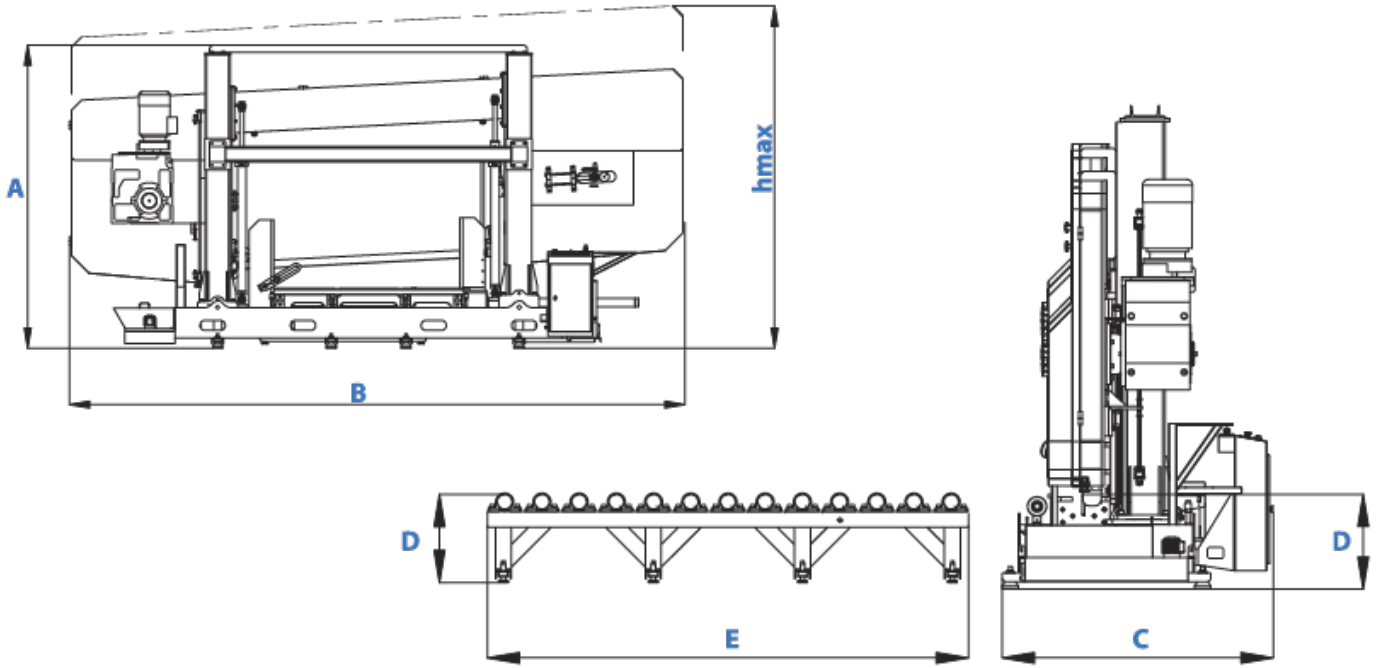

A	3015 mm 118.70 inch	B	6125 mm 241.14 inch	C	1690 mm 66.54 inch	D	591 mm 23.27 inch	E	3000 mm 118.11 inch	hmax	3765 mm 148.23 inch
----------	------------------------	----------	------------------------	----------	-----------------------	----------	----------------------	----------	------------------------	-------------	------------------------

Yarı Otomatik Semi Automatic	Şerit Ölçüsü Blade Dimension 80x1.6x13460 mm 3 x 0.063x529.52 inch	Şerit Motoru Blade Motor 11kW-1500 d/dk 14.75hp-1500 rpm	Talaş Fırçası M. Chip Brush M. 0.09 kW-1500 d/dk 0.12hp / 1500 rpm
Hidrolik Motor Hydraulic Pump Motor 3kW-1500 d/dk 4hp-1500 rpm	Soğutucu Motor Cooling Liquid Motor 0.37 kW-3000 d/dk 0.49 hp-3000 rpm	Voltaj Voltage 400 V 400 V	Maksimum Güç Maximum Power 14.46 kW 19.39 hp
Kesme Hızı Cutting Speed 15 m/dk-49 ft/mn 60 m/dk-196 ft/mn	Ağırlık Weight 8750 kg 19290 lbs	Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	Şerit Germe Sistemi Blade Tensioning System Hidrolik Hydraulic


Kesim Kapasitesi Cutting Capacity 1200 mm 47.24 inch	Kesim Kapasitesi Cutting Capacity 2000 mm 78.74 inch	90°	60°	45°	30°	0°	15°	45°	60°
						1200 mm 47.24 inch			
						1200 x 1200 mm 47.24 x 47.24 inch			
						1200 x 2000 mm 47.24 x 78.74 inch			

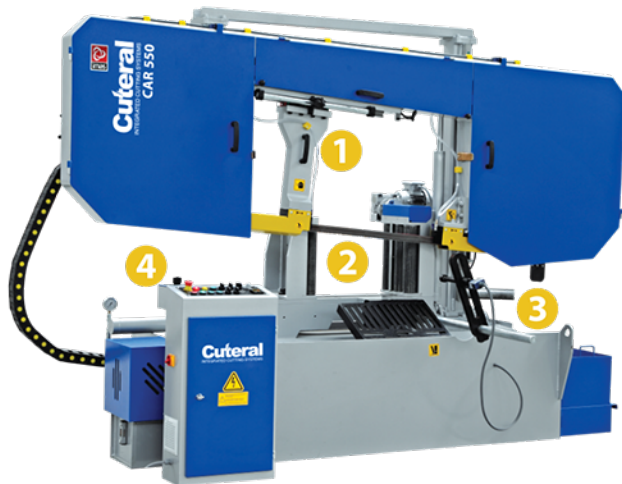

CSM 800-900

CSM 800-900


Technical details

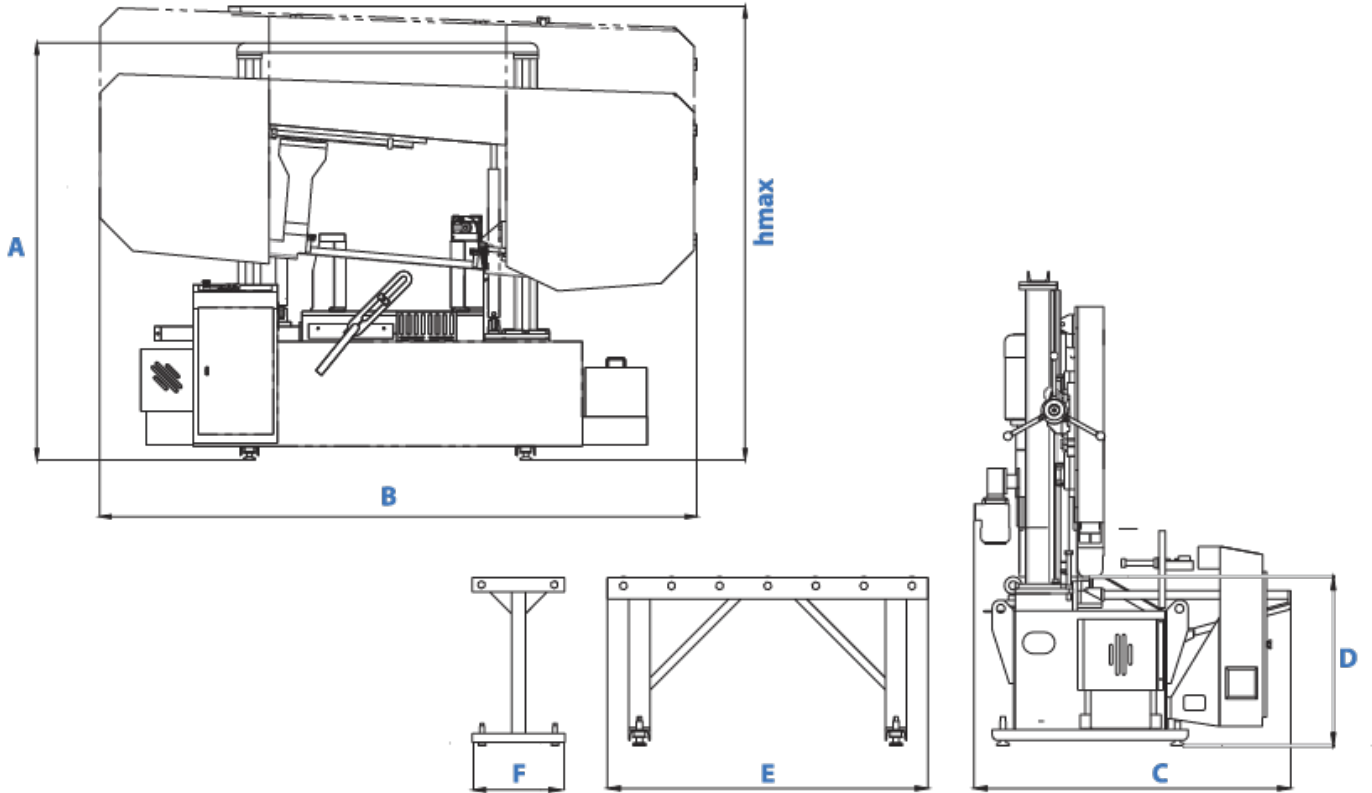

A	2215 mm 87.20 Inch	B	3160 mm 124.41 Inch	C	1480 mm 58.27 Inch	D	790 mm 31.10 Inch	E	1500 mm 59.06 Inch	F	425 mm 16.73 Inch	hmax	2400 mm 94.49 Inch
----------	-----------------------	----------	------------------------	----------	-----------------------	----------	----------------------	----------	-----------------------	----------	----------------------	-------------	-----------------------

Otomatik Automatic	Şerit Ölçüsü Blade Dimension 41x1.3x5850 mm 1 1/2x 0.050x269.6 Inch	kW Şerit Motoru Blade Motor 4 kw- 1000d/dk 5.36 hp-1000 rpm	kW Sürücü Motor Feeding Motor 0.55kW-1000 d/dk 0.73 kW-1000 rpm
kW OIL Hidrolik Motor Hydraulic Pump Motor 1.1kW-1500 d/dk 1.48hp-1500 rpm	kW H ₂ O Soğutucu Motor Cooling Liquid Motor 0.12kW 3000d/dk 0.16hp - 3000 rpm	Voltaj Voltage 400 V 400 V	Maksimum Güç Maximum Power 5.77 kW 7.73 hp
Kesme Hızı Cutting Speed 15 m/dk- 49 ft/mn 100 m/dk- 328 ft/mn	KG LBS Ağırlık Weight 2300 kg 5070 lb	Matzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	Şerit Germe Sistemi Blade Tensioning System Hidrolikmekanik Hydramechanic


Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity	mm Inch	60°	45°	30°	0°	10°	15°	60°
550 mm 21.65 Inch	550 mm 21.65 Inch	● ■ □				550 mm 21.65 Inch			
						550 x 550 mm 21.65 x 21.65 Inch			
						550 x 550 mm 21.65 x 21.65 Inch			

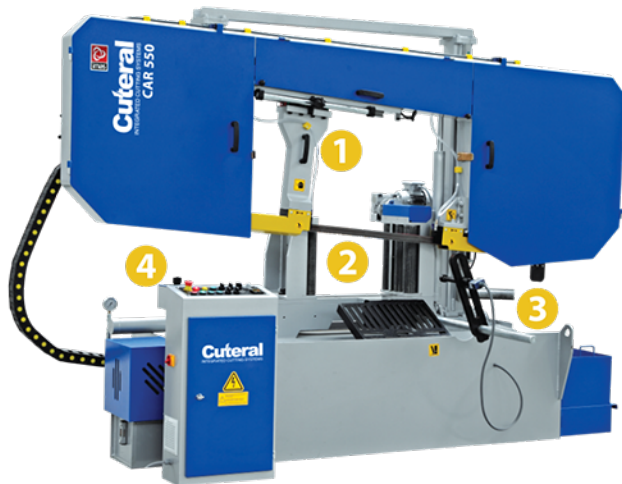

CAR 550

CAR 550



Technical details

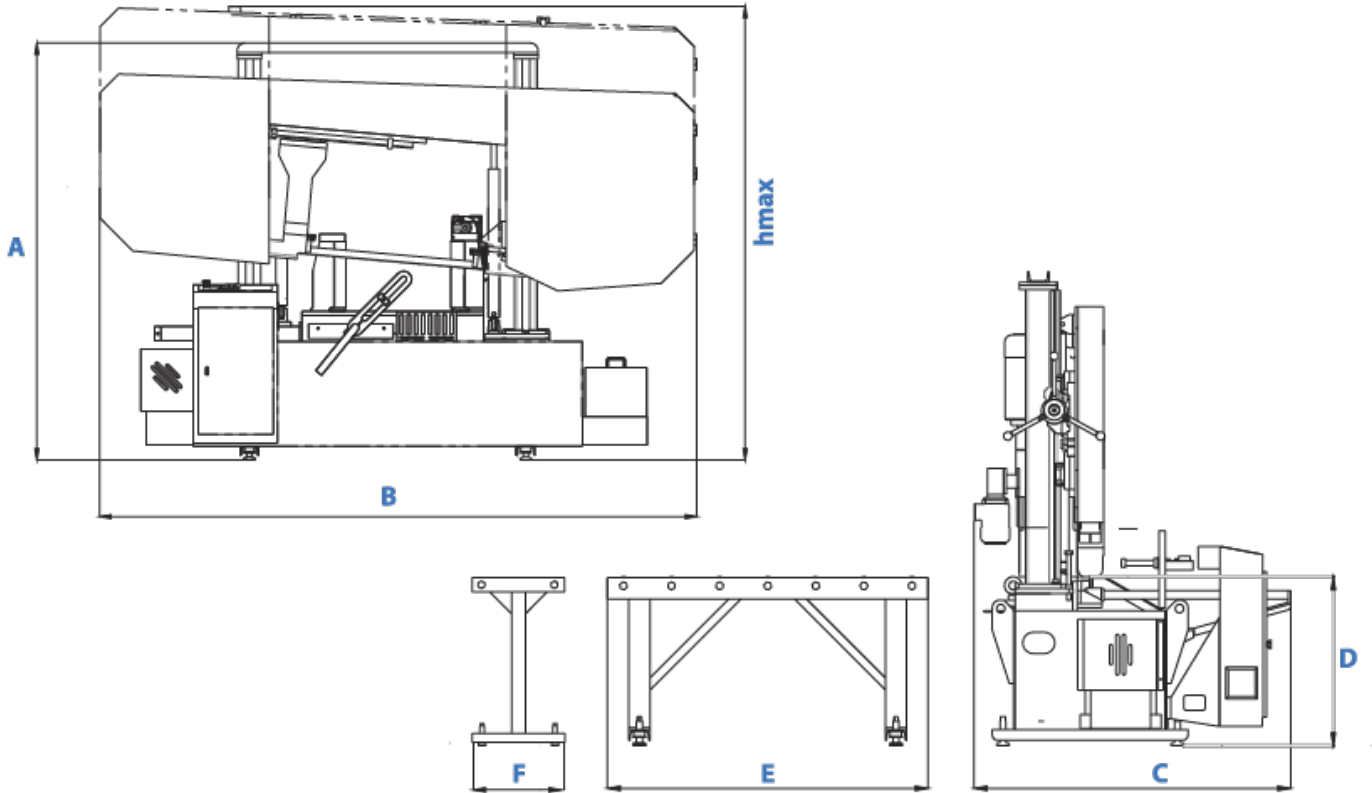

A	2215 mm 87.20 Inch	B	3160 mm 124.41 Inch	C	1480 mm 58.27 Inch	D	790 mm 31.10 Inch	E	1500 mm 59.06 Inch	F	425 mm 16.73 Inch	hmax	2400 mm 94.49 Inch
----------	-----------------------	----------	------------------------	----------	-----------------------	----------	----------------------	----------	-----------------------	----------	----------------------	-------------	-----------------------

Otomatik Automatic	Şerit Ölçüsü Blade Dimension 41x1.3x5850 mm 1 1/2x 0.050x269.6 Inch	Şerit Motoru Blade Motor 4 kw-1000d/dk 5.36 hp-1000 rpm	Sürücü Motor Feeding Motor 0.55kW-1000 d/dk 0.73 kW-1000 rpm
Hidrolik Motor Hydraulic Pump Motor 1.1kW-1500 d/dk 1.48hp-1500 rpm	Soğutucu Motor Cooling Liquid Motor 0.12kW 3000d/dk 0.16hp - 3000 rpm	Voltaaj Voltage 400 V 400 V	Maksimum Güç Maximum Power 5.77 kW 7.73 hp
Keşme Hızı Cutting Speed 15 m/dk-49 ft/mn 100 m/dk-328 ft/mn	Ağırlık Weight 2300 kg 5070 lb	Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	Şerit Germe Sistemi Blade Tensioning System Hidrolikmekanik Hydramechanic


90°	60°	45°	30°	0°	10°	15°	60°
Kesim Kapasitesi Cutting Capacity 550 mm 21.65 Inch	Kesim Kapasitesi Cutting Capacity 550 mm 21.65 Inch			550 mm 21.65 Inch			
				550 x 550 mm 21.65 x 21.65 Inch			
				550 x 550 mm 21.65 x 21.65 Inch			

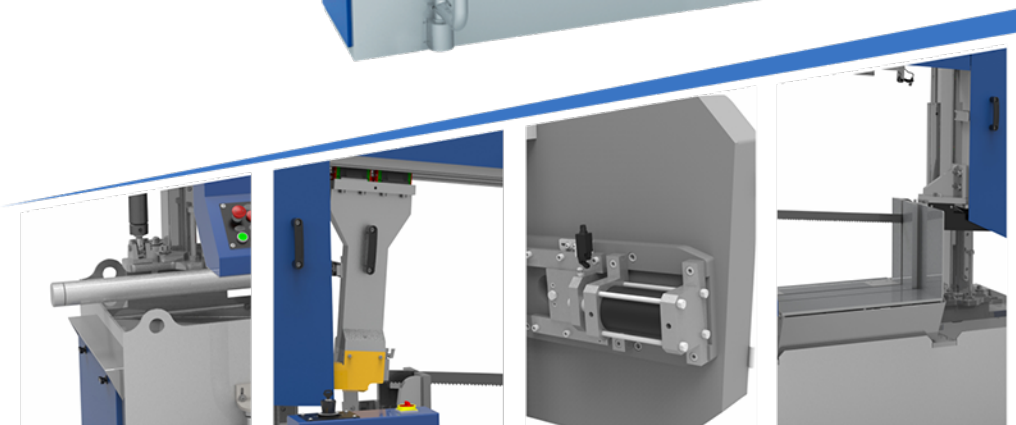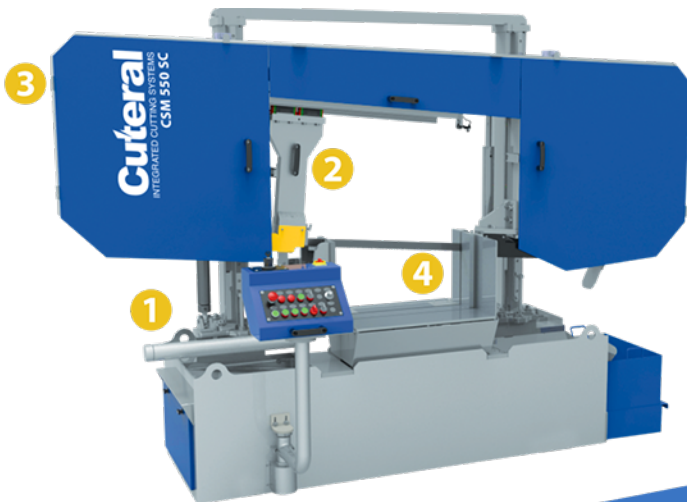

CSM 550 DM

CSM 550 DM



Technical details

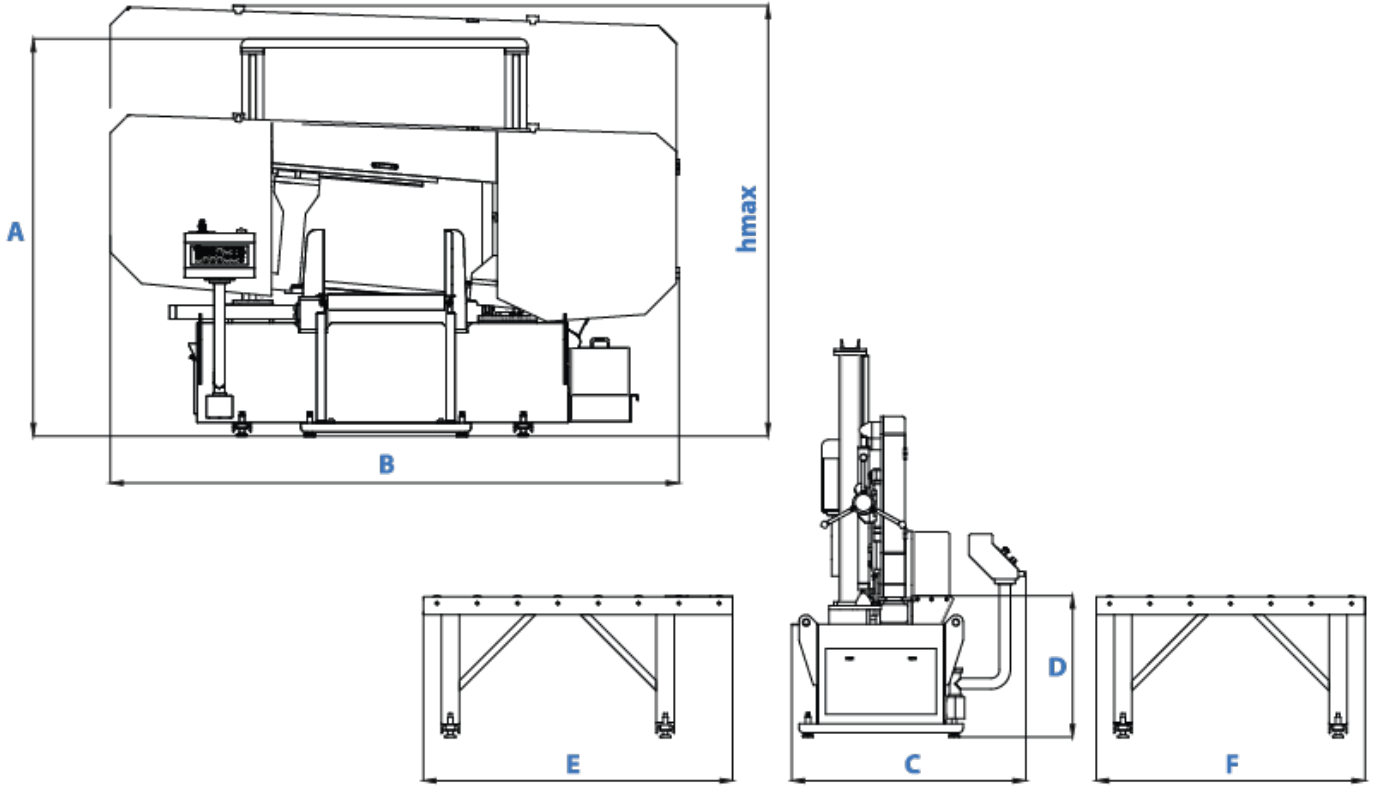

A	2215 mm 87.20 Inch	B	3165 mm 124.61 Inch	C	1305 mm 51.38 Inch	D	790 mm 31.10 Inch	E	1725 mm 67.91 Inch	F	2000 mm 78.74 Inch	hmax	2400 mm 94.49 Inch
----------	-----------------------	----------	------------------------	----------	-----------------------	----------	----------------------	----------	-----------------------	----------	-----------------------	-------------	-----------------------

Yarı Otomatik Semi Automatic	Şerit Ölçüsü Blade Dimension 41x1.3x6850 mm 1 1/2 x 0.050x269.6 Inch	Şerit Motoru Blade Motor 4 kW-1000 d/dk 5.36hp 1000rpm	Sürücü Motor Feeding Motor Manuel Manual
Hidrolik Motor Hydraulic Pump Motor 1.1kW-1500 d/dk 1.48hp-1500 rpm	Soğutucu Motor Cooling Liquid Motor 0.12kW-3000 d/dk 0.16hp-3000 rpm	Voltaj Voltage 400 V 400 V	Maksimum Güç Maximum Power 5.22 kW 7 hp
Kesme Hızı Cutting Speed 15 m/dk-49 ft/mn 100 m/dk-328 ft/mn	Ağırlık Weight 2200 kg 4850 lbs	Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	Şerit Germe Sistemi Blade Tensioning System Hidro mekanik Hydramechanic


Kesim Kapasitesi Cutting Capacity 550 mm 21.65 Inch	Kesim Kapasitesi Cutting Capacity 600 mm 23.62 Inch	60° 45° 30° 0° 10° 15° 30°
Kesim Kapasitesi Cutting Capacity 550 mm 21.65 Inch	Kesim Kapasitesi Cutting Capacity 550 x 550 mm 21.65 x 21.65 Inch	Kesim Kapasitesi Cutting Capacity 550 x 880 mm 21.65 x 35.59 Inch

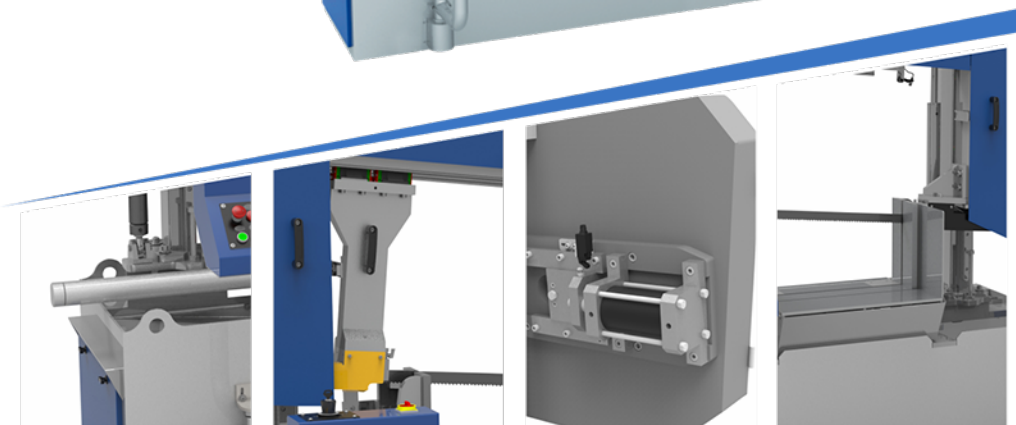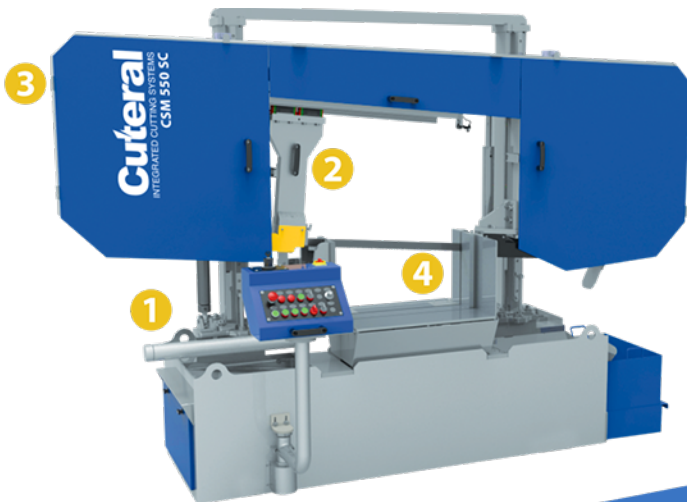

CSM 550 SC

CSM 550 SC




Technical details

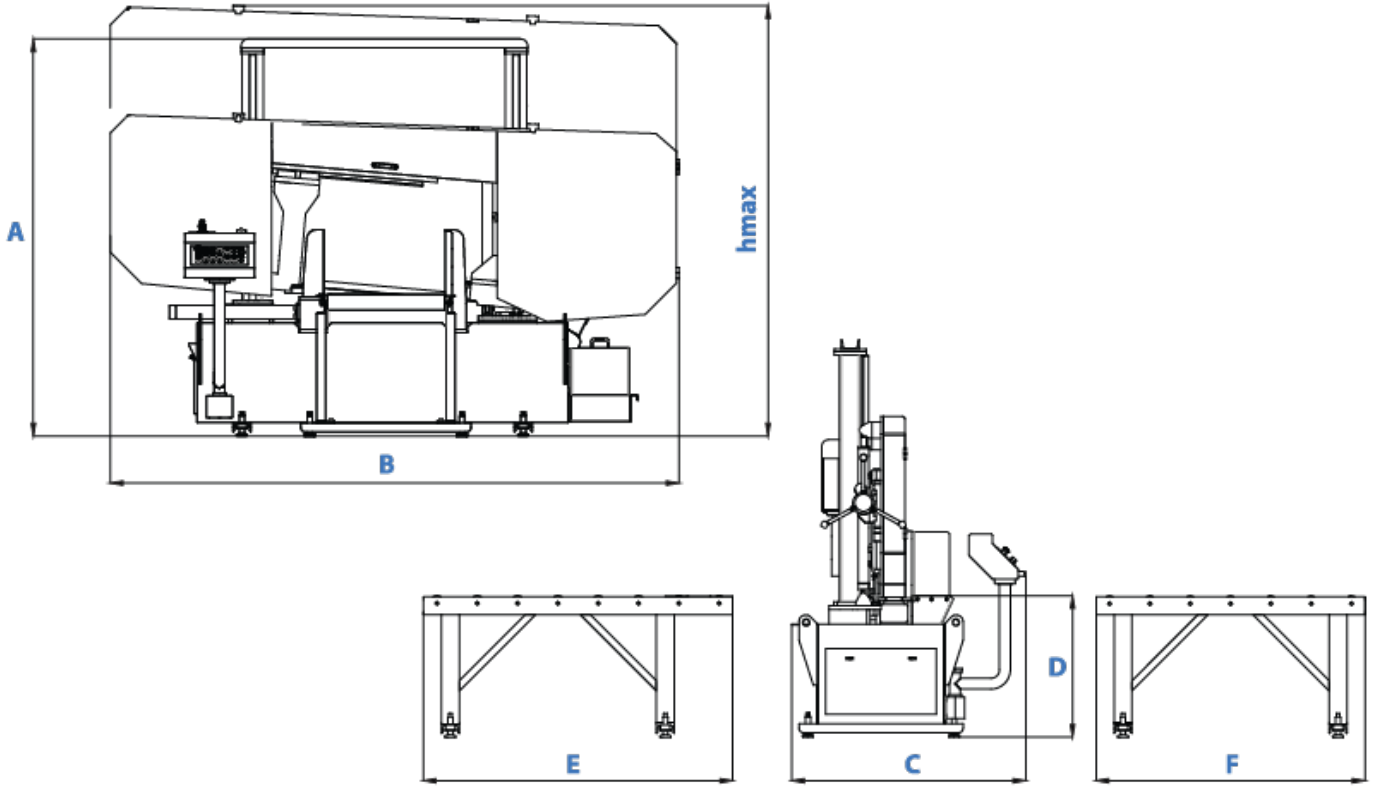

A	2215 mm 87.20 Inch	B	3165 mm 124.61 Inch	C	1305 mm 51.38 Inch	D	790 mm 31.10 Inch	E	1725 mm 67.91 Inch	F	2000 mm 78.74 Inch	hmax	2400 mm 94.49 Inch
----------	-----------------------	----------	------------------------	----------	-----------------------	----------	----------------------	----------	-----------------------	----------	-----------------------	-------------	-----------------------

Yarı Otomatik Semi Automatic	Şerit Ölçüsü Blade Dimension 41x1.3x6850 mm 1 1/2 x 0.050x269.6 Inch	Serit Motoru Blade Motor 4 kW-1000 d/dk 5.36hp 1000rpm	Sürücü Motor Feeding Motor Manuel Manual
Hidrolik Motor Hydraulic Pump Motor 1.1kW-1500 d/dk 1.48hp-1500 rpm	Soğutucu Motor Cooling Liquid Motor 0.12kW-3000 d/dk 0.16hp-3000 rpm	Voltaj Voltage 400 V 400 V	Maksimum Güç Maximum Power 5.22 kW 7 hp
Kesme Hızı Cutting Speed 15 m/dk-49 ft/mn 100 m/dk-328 ft/mn	Ağırlık Weight 2200 kg 4850 lbs	Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	Şerit Germe Sistemi Blade Tensioning System Hidro mekanik Hydramechanic


Kesim Kapasitesi Cutting Capacity 550 mm 21.65 Inch	Kesim Kapasitesi Cutting Capacity 600 mm 23.62 Inch	60°	45°	30°	0°	10°	15°	30°
					550 mm 21.65 Inch			
					550 x 550 mm 21.65 x 21.65 Inch			
					550 x 880 mm 21.65 x 25.59 Inch			

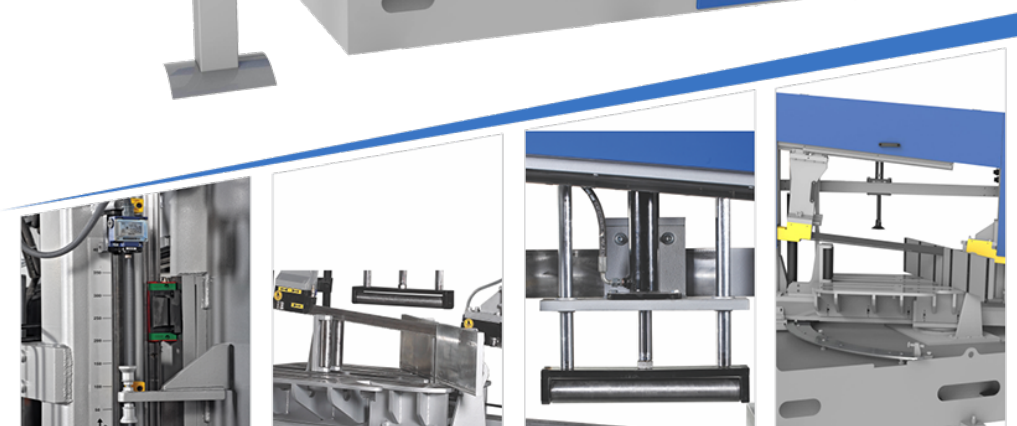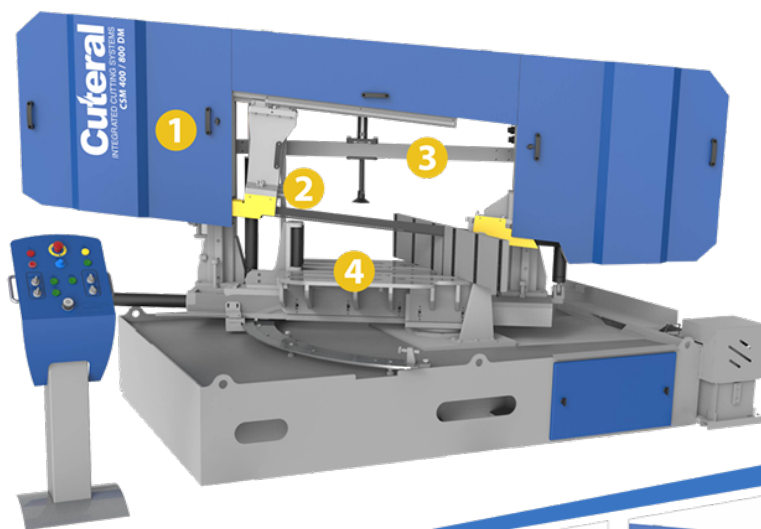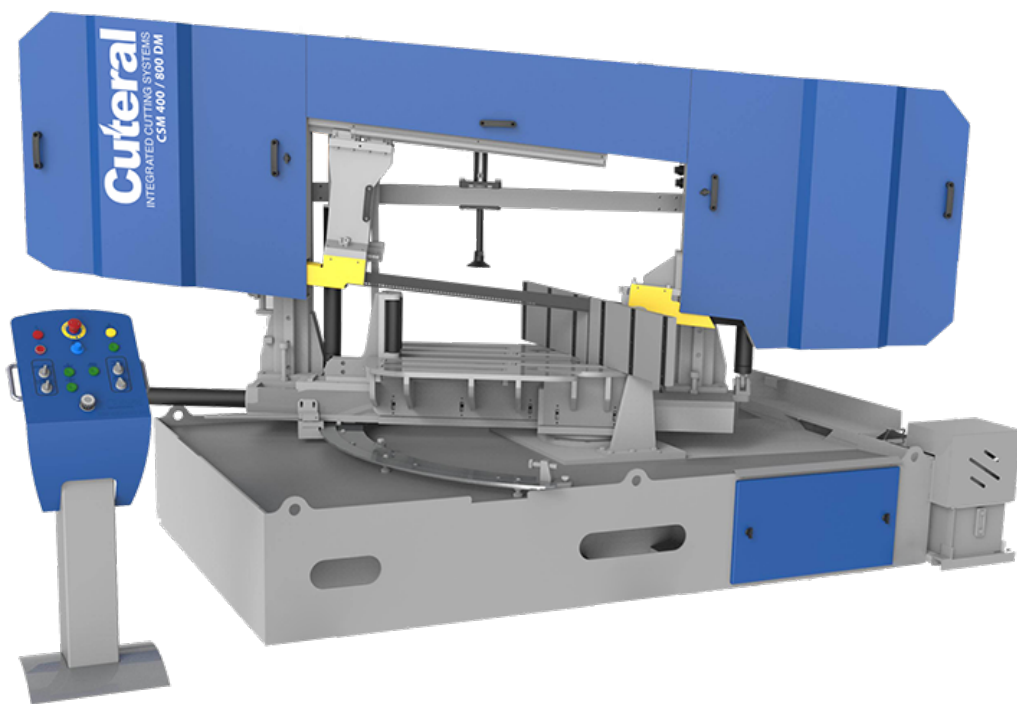

CUTERAL Pillar Saw

CSM 400 – 800 DM

Technical details

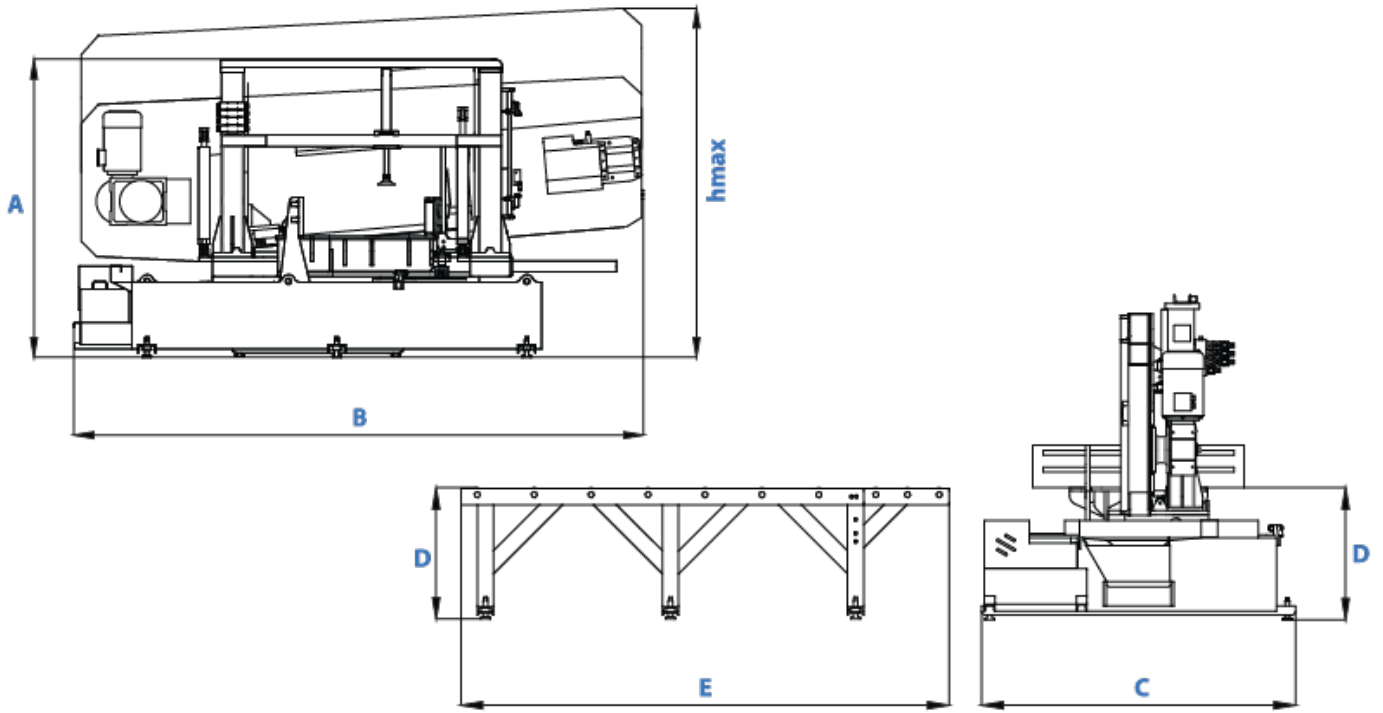

A	2000 mm 78.74 inch	B	3825 mm 150.59 inch	C	1930 mm 75.98 inch	D	815 mm 32.09 inch	E	3000 mm 118.11 inch	hmax	2350 mm 92.52 inch
----------	-----------------------	----------	------------------------	----------	-----------------------	----------	----------------------	----------	------------------------	-------------	-----------------------

Yarı Otomatik Semi Automatic	Şerit Ölçüsü Blade Dimension 54x1.6x130 mm 2 x 0.063x320 inch	Şerit Motoru Blade Motor 4kW-1000d/dk 5.36hp-1000 rpm	Sürüş Motoru Feeding Motor Manual Manual
Hidrolik Motor Hydraulic Pump Motor 1.1kW-1500 d/dk 1.48 hp- 1500rpm	Soğutucu Motor Cooling Liquid Motor 0.12kW 3000d/dk 0.16hp - 3000 rpm	Voltaj Voltage 400 V 400 V	Maksimum Güç Maximum Power 5.22 kW 7 hp
Kesme Hızı Cutting Speed 15 m/dk-49 ft/min 100 m/dk- 328 ft/min	Ağırlık Weight 3750 kg 8267 lbs	Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	Şerit Germe Sistemi Blade Tensioning System Hidro mekanik Hydramechanic

Kesim Kapasitesi Cutting Capacity 400 mm 15.75 inch	Kesim Kapasitesi Cutting Capacity 800 mm 31.50 inch	90°	60°	45°	30°	0°	15°	30°	45°	60°
400 mm 15.75 inch	800 mm 31.50 inch	●	400 mm 15.75 inch	400 mm 15.75 inch	400 mm 15.75 inch	400 mm 15.75 inch	400 mm 15.75 inch	400 mm 15.75 inch	400 mm 15.75 inch	400 mm 15.75 inch
400 x 400 mm 15.75 x 15.75 inch	400 x 400 mm 15.75 x 15.75 inch	■	400 x 400 mm 15.75 x 15.75 inch	400 x 400 mm 15.75 x 15.75 inch	400 x 400 mm 15.75 x 15.75 inch	400 x 400 mm 15.75 x 15.75 inch	400 x 400 mm 15.75 x 15.75 inch	400 x 400 mm 15.75 x 15.75 inch	400 x 400 mm 15.75 x 15.75 inch	400 x 400 mm 15.75 x 15.75 inch
400 x 500 mm 15.75 x 19.69 inch	400 x 500 mm 15.75 x 19.69 inch	■	400 x 500 mm 15.75 x 19.69 inch	400 x 655 mm 15.75 x 25.79 inch	400 x 800 mm 15.75 x 31.50 inch	400 x 800 mm 15.75 x 31.50 inch	400 x 655 mm 15.75 x 25.79 inch	400 x 655 mm 15.75 x 25.79 inch	400 x 500 mm 15.75 x 19.69 inch	400 x 500 mm 15.75 x 19.69 inch



CUTERAL Pillar Saw


CSM 550

Technical details

A	2215 mm 87.20 Inch	B	3200 mm 125.98 Inch	C	1460 mm 57.48 Inch	D	765 mm 30.12 Inch	E	1500 mm 59.06 Inch	F	1690 mm 66.54 Inch	hmax	2410 mm 94.88 Inch
----------	-----------------------	----------	------------------------	----------	-----------------------	----------	----------------------	----------	-----------------------	----------	-----------------------	-------------	-----------------------

Yarı Otomatik Semi Automatic	Şerit Ölçüsü Blade Dimension 41x1.3x6850 mm 1 1/2 x 0.050x269.6 Inch	Şerit Motoru Blade Motor 4 kW-1000d/dk 5.36hp -1000 rpm	Sürecü Motor Feeding Motor Manual Manual
Hidrolik Motor Hydraulic Pump Motor 1.1kW-1500 d/dk 1.46hp 1500 rpm	Soğutucu Motor Cooling Liquid Motor 0.12kW 3000d/dk 0.16hp -3000 rpm	Voltaaj Voltage 400 V 400 V	Maksimum Güç Maximum Power 5.22kW 7 hp
Kesme Hızı Cutting Speed 15 m/dk-49 ft/min 100 m/dk-328 ft/min	Ağırlık Weight 2100 kg 4620 lbs	Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic

90°		mm inch							
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity	●	370 mm 14.57 Inch	460 mm 18.11 Inch	550 mm 21.65 Inch				
550 mm 21.65 Inch	600 mm 23.62 Inch	■	370 x 370 mm 14.57 x 14.57 Inch	460 x 460 mm 18.11 x 18.11 Inch	550 x 550 mm 21.65 x 21.65 Inch				
		■	550 x 370 mm 21.65 x 14.57 Inch	550 x 460 mm 21.65 x 18.11 Inch	550 x 600 mm 21.65 x 23.62 Inch				

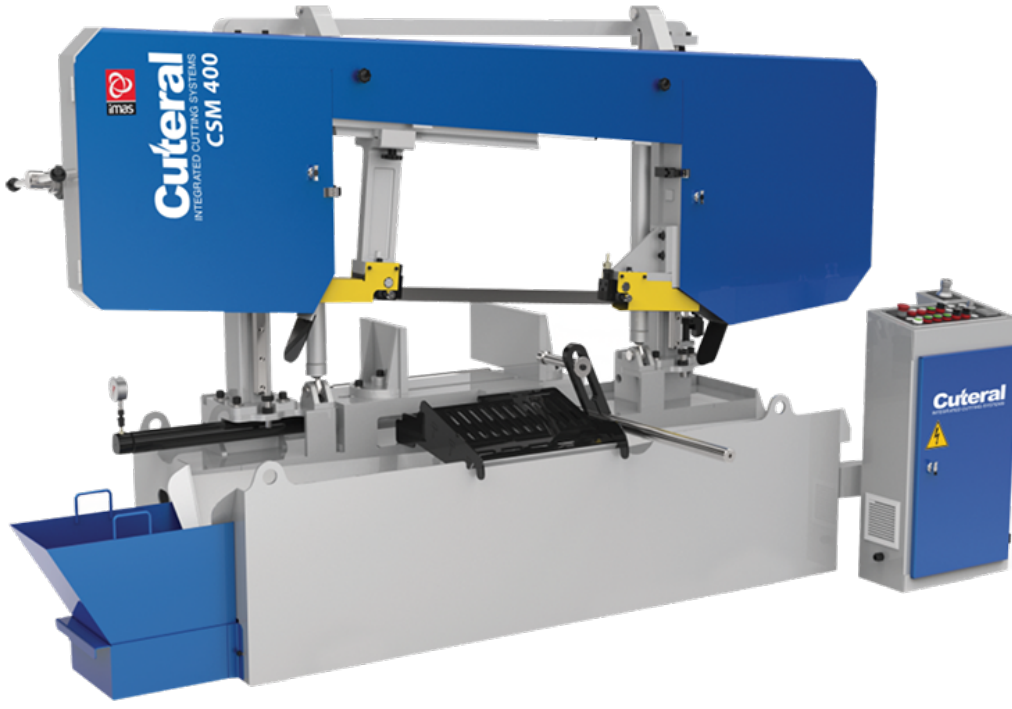

CUTERAL Pillar Saw

CSM 400

Technical details

A	1740 mm 68.50 inch	B	3022 mm 118.98 inch	C	1365 mm 53.74 inch	D	1500 mm 59.06 inch	E	675 mm 26.57 inch	F	1228 mm 48.35 inch	hmax	1975 mm 77.76 inch
----------	-----------------------	----------	------------------------	----------	-----------------------	----------	-----------------------	----------	----------------------	----------	-----------------------	-------------	-----------------------

Yarı Otomatik Semi Automatic	Şerit Ölçüsü Blade Dimension 41x1.3x5715 mm 1 1/2 x 0.050x225 Inch	Şerit Motoru Blade Motor 4hp-1500d/dk 5.36 hp-1000 rpm	Sürüş Motoru Feeding Motor Manual Manual
Hidrolik Motor Hydraulic Pump Motor 0.37kW-1500 d/dk 0.5 hp /1500 rpm	Soğutucu Motor Cooling Liquid Motor 0.12kW 3000d/dk 0.16hp - 3000 rpm	Voltaaj Voltage 400 V 400 V	Maksimum Güç Maximum Power 4.49kW 6.02 hp
Kesme Hızı Cutting Speed 15 m/dk- 49 ft/min 100 m/dk- 328 ft/min	Ağırlık Weight 1220 kg 2690 lbs	Malzeme Sıkma Sistemi Material Clamping System Hidrolik Hydraulic	Şerit Germe Sistemi Blade Tensioning System Hidromekanik Hydramechanic

90°	60°	45°	30°	0°	10°	45°	60°
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity	300 mm 11.81 Inch	400 mm 15.75 Inch	400 mm 15.75 Inch	400 x 400 mm 15.75 x 15.75 Inch		
400 mm 15.75 inch	490 mm 19.29 inch	400 x 300 mm 15.75 x 11.81 Inch	400 x 400 mm 15.75 x 15.75 Inch	400 x 490 mm 15.75 x 19.29 Inch			

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Россия +7(495)268-04-70

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Киргизия +996(312)-96-26-47

Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Саранск (8342)22-96-24
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Казахстан +7(7172)727-132

Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35
Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93